

Direct Operated 3 Port Solenoid Valve

For Water, Oil, Steam, Air

Reduction of
power consumption
(DC specification)

6 W → **4.5 w**

8 W → **7 w**

11.5 W → **10.5 w**



New

VX3

Series **VX31/32/33**

Solenoid valves for various fluids used in a wide variety of


Improvement of corrosion resistance

Special magnetic material adopted

Enclosure: Equivalent to IP65

Low noise construction

Special construction enables to reduce the metal noise. (DC specification)

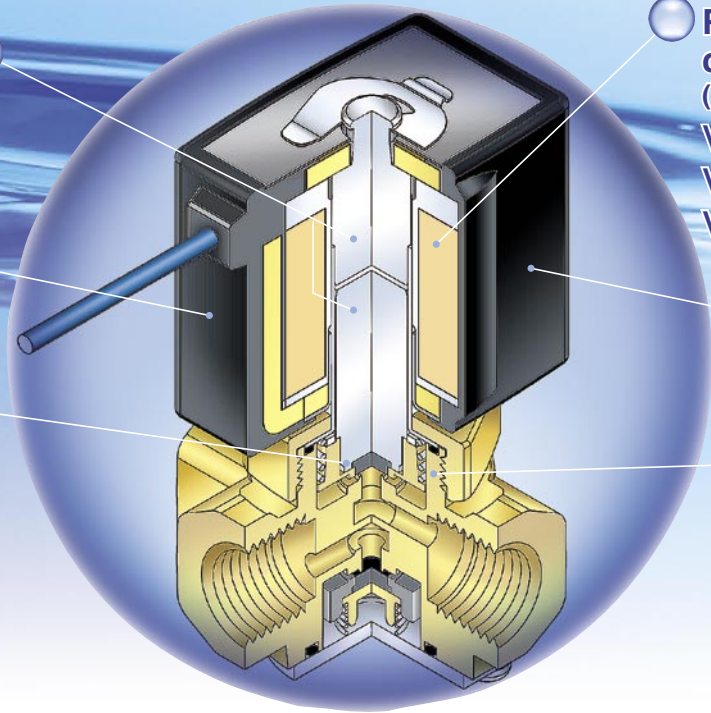

Reduction of power consumption (DC specification)

VX31: 6 W → **4.5 W**

VX32: 8 W → **7 W**

VX33: 11.5 W → **10.5 W**

Flame resistance UL94V-0 conformed

Flame resistant mold coil material


Improvement of maintenance performance

Maintenance is performed easily due to the threaded assembly.

Direct Operated 3 Port Solenoid Valve

For Water, Oil, Steam, Air

New Series VX31/32/33

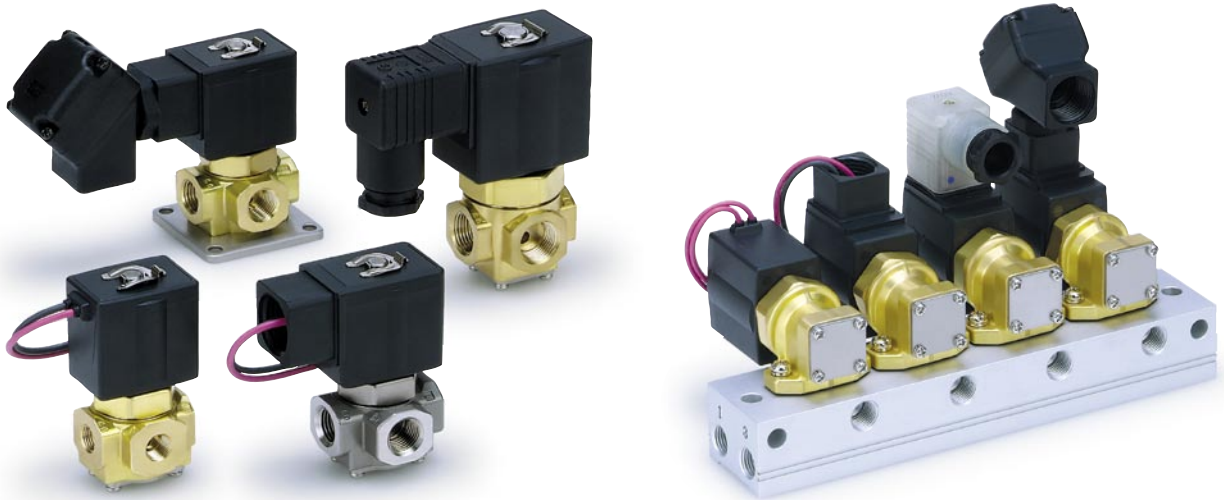

Normally Closed (N.C.) / Normally Open (N.O.) / Common (COM.)

| Model | Orifice size | | | | Port size | Material | | | | Fluid |
|-------|--------------|---------|-------|-------|-----------|-----------------|-----------------|------|------|------------------------|
| | 1.5 mmø | 2.2 mmø | 3 mmø | 4 mmø | | Body | Guide pin | Seal | | |
| VX31 | ● | ● | ● | — | 1/8, 1/4 | Brass | PPS | NBR | NBR | Water, Oil, Steam, Air |
| VX32 | — | ● | ● | ● | 1/4, 3/8 | Stainless steel | Stainless steel | FKM | FKM | |
| VX33 | — | ● | ● | ● | 1/4, 3/8 | Stainless steel | Stainless steel | EPDM | EPDM | |

Manifold: Normally Closed (N.C.) / Normally Open (N.O.) / Common (COM.)

| Model | Orifice size | | | | Port size (Common SUP/EXH type) | | | Material | | | Fluid | |
|-------|--------------|---------|-------|-------|---------------------------------|----------|----------|----------|-----------|-----------------|-------|----------|
| | 1.5 mmø | 2.2 mmø | 3 mmø | 4 mmø | IN port | OUT port | EXH port | Body | Guide pin | Seal | | |
| VVX31 | ● | ● | ● | — | 1/4 | 1/8, 1/4 | 1/4 | Brass | PPS | Stainless steel | NBR | Oil, Air |
| VVX32 | — | ● | ● | ● | | | | | | | | |
| VVX33 | — | ● | ● | ● | | | | | | | | |

applications—New **VX** Series variations

Direct Operated 2 Port

VX21/22/23

For Air, Vacuum, Water, Steam, Oil



| Valve type | Port size | Orifice size mmØ |
|------------|------------|------------------|
| N.C./N.O. | 1/8 to 1/2 | 2 to 10 |

Pilot Operated 2 Port

VXD21/22/23

For Air, Water, Oil



| Valve type | Port size | Orifice size mmØ |
|------------|--------------------------|------------------|
| N.C./N.O. | 1/4 to 1 32 A to 50 A | 10 to 50 |

Pilot Operated 2 Port for Zero Differential Pressure

VXZ22/23

For Air, Vacuum, Water, Oil



| Valve type | Port size | Orifice size mmØ |
|------------|-----------|------------------|
| N.C./N.O. | 1/4 to 1 | 10 to 25 |

Pilot Operated 2 Port

VXP21/22/23

For Steam (Air, Water, Oil)



| Valve type | Port size | Orifice size mmØ |
|------------|--------------------------|------------------|
| N.C./N.O. | 1/4 to 2 32 A to 50 A | 10 to 50 |

Water Hammer Relief, Pilot Operated 2 Port

VXR21/22/23

For Water, Oil




| Valve type | Port size | Orifice size mmØ |
|------------|-----------|------------------|
| N.C./N.O. | 1/2 to 2 | 20 to 50 |

Pilot Operated 2 Port for High Pressure

VXH22

For Air, Water, Oil

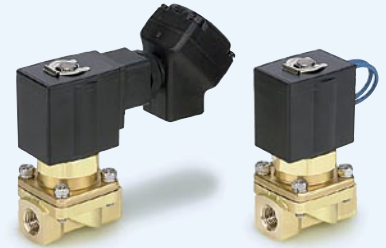


| Valve type | Port size | Orifice size mmØ |
|------------|------------|------------------|
| N.C. | 1/4 to 1/2 | 10 |

2 Port for Dust Collector (Solenoid type, Air Operated type)

VXF21/22, VXFA21/22

For Air

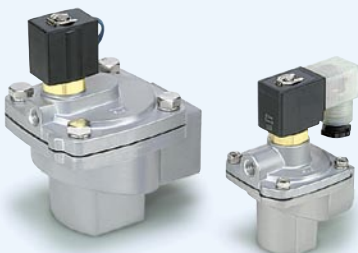

| Valve type | Port size | Orifice size mmØ |
|------------|--------------|------------------|
| N.C. | 3/4 to 1 1/2 | 20 to 40 |

Air Operated 2/3 Port

VXA21/22, VXA31/32

For Air, Vacuum, Water, Oil



| Model | Valve type | Port size | Orifice size mmØ |
|----------|------------|------------|------------------|
| VXA21/22 | N.C./N.O. | 1/8 to 1/2 | 3 to 10 |
| VXA31/32 | COM. | 1/8 to 3/8 | 1.5 to 4 |

The VX series has been renewed as the **new VX series**, with a new construction

Solenoid Valves Flow Characteristics

(How to indicate flow characteristics)

1. Indication of flow characteristics

Indication of the flow characteristics in specifications for equipment such as a solenoid valve, etc. is depending on "Table (1)".

Table (1) Indication of Flow Characteristics

| Corresponding equipment | Indication by international standard | Other indications | Standards conforming to |
|--|--------------------------------------|-------------------|---|
| Equipment for pneumatics | C, b | — | ISO 6358: 1989 JIS B 8390: 2000 |
| | — | S | JIS B 8390: 2000 Equipment: JIS B 8373, 8374, 8375, 8379, 8381 |
| | | C_v | ANSI/(NFPA)T3.21.3: 1990 |
| Equipment for controlling process fluids | A_v | — | IEC60534-2-3: 1997 JIS B 2005: 1995 |
| | — | C_v | Equipment: JIS B 8471, 8472, 8473 |

2. Equipment for pneumatics

2.1 Indication according to the international standards

(1) Standards conforming to

ISO 6358: 1989 : Pneumatic fluid power—Components using compressible fluids—
Determination of flow-rate characteristics

JIS B 8390: 2000 : Pneumatic fluid power—Components using compressible fluids—
How to test flow-rate characteristics

(2) Definition of flow characteristics

Flow rate characteristics are indicated as a result of a comparison between sonic conductance C and critical pressure ratio b .
Sonic conductance C : Value which divides the passing mass flow rate of an equipment in a choked flow condition by the product of the absolute upstream pressure and the density in the standard condition.

Critical pressure ratio b : Choked flow will occur when the pressure ratio (downstream pressure/upstream pressure) is at or smaller than this value.

Choked flow : It is the flow in which the upstream pressure is higher than the downstream pressure and where sonic speed is reached in a certain part of the equipment.
Gaseous mass flow rate is in proportion to the upstream pressure and not dependent on the downstream pressure.

Subsonic flow : Flow when the pressure ratio is greater than the critical pressure ratio.

Standard condition : Air in a temperature state of 20°C, absolute pressure 0.1 MPa (= 100 kPa = 1 bar), relative humidity 65%.

It is stipulated by adding the abbreviation (ANR) after the unit depicting air volume.
(standard reference atmosphere)

Standard conforming to: ISO 8778: 1990 Pneumatic fluid power—Standard reference atmosphere,
JIS B 8393: 2000: Pneumatic fluid power—Standard reference atmosphere

(3) Formula of flow rate

It can be indicated by the practical unit as following.

When

$$\frac{P_2 + 0.1}{P_1 + 0.1} \leq b, \text{ choked flow}$$

$$Q = 600 \times C (P_1 + 0.1) \sqrt{\frac{293}{273 + t}} \dots\dots\dots(1)$$

When

$$\frac{P_2 + 0.1}{P_1 + 0.1} > b, \text{ subsonic flow}$$

$$Q = 600 \times C (P_1 + 0.1) \sqrt{1 - \left[\frac{\frac{P_2 + 0.1}{P_1 + 0.1} - b}{1 - b} \right]^2} \sqrt{\frac{293}{273 + t}} \dots\dots\dots(2)$$

Q : Air flow rate [dm³/min (ANR)], the SI unit dm³ (Cubic decimetre) is also allowed to be described by ℓ (liter). 1 dm³ = 1 ℓ.

Solenoid Valves Flow Characteristics

C : Sonic conductance [$\text{dm}^3/(\text{s}\cdot\text{bar})$]

b : Critical pressure ratio [—]

P_1 : Upstream pressure [MPa]

P_2 : Downstream pressure [MPa]

t : Temperature [$^{\circ}\text{C}$]

Note) Formula of subsonic flow is the elliptic analogous curve.

Flow characteristics curve is indicated in the Graph (1) For details, please use SMC's "Energy Saving Program".


Example)

Obtain the air flow rate when $P_1 = 0.4$ [MPa], $P_2 = 0.3$ [MPa], $t = 20$ [$^{\circ}\text{C}$] for a solenoid valve where $C = 2$ [$\text{dm}^3/(\text{s}\cdot\text{bar})$] and $b = 0.3$.

According to formula (1), the maximum flow rate = $600 \times 2 \times (0.4 + 0.1) \times \sqrt{\frac{293}{273 + 20}} = 600$ [dm^3/min (ANR)]

$$\text{Pressure ratio} = \frac{0.3 + 0.1}{0.4 + 0.1} = 0.8$$

Based on the Graph (1), the flow rate ratio is going to be 0.7 if it is read with a pressure ratio of 0.8 and a flow ratio of $b = 0.3$. Hence, flow rate = Max. flow rate \times flow rate ratio = $600 \times 0.7 = 420$ [dm^3/min (ANR)]

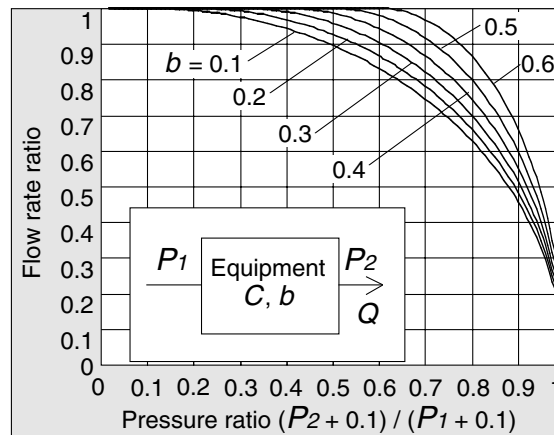

Graph (1) Flow characteristics line

(4) Test method

Pipe the test equipment to the test circuit shown in Fig. (1). Keep the upstream pressure at a certain constant level above 0.3MPa. First measure the maximum flow rate in saturation. Then, measure the flow rate, upstream pressure and downstream pressure each at 80%, 60%, 40% and 20% points of the flow rate. Calculate the sonic conductance C from the maximum flow rate. Also substitute other data for variables in the formula for subsonic flow and obtain the critical pressure rate b by averaging the critical pressure rates at those points.

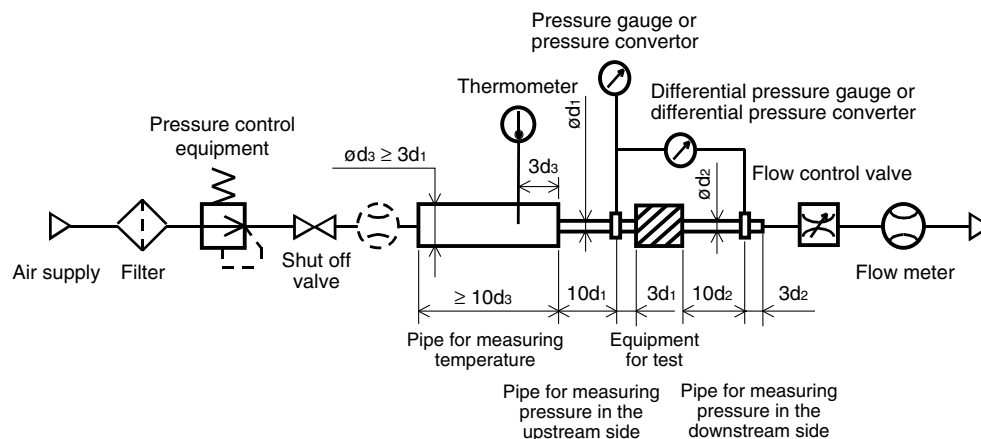


Fig. (1) Test circuit based on ISO 6358, JIS B 8390

Solenoid Valves Flow Characteristics

(How to indicate flow characteristics)

2.2 Effective area *S*

(1) Standards conforming to

**JIS B 8390: 2000: Pneumatic fluid power—Components using compressible fluids—
Determination of flow rate characteristics**

Equipment standards: JIS B 8373: 2 port solenoid valve for pneumatics

JIS B 8374: 3 port solenoid valve for pneumatics

JIS B 8375: 4 port, 5 port solenoid valve for pneumatics

JIS B 8379: Silencer for pneumatics

JIS B 8381: Fittings of flexible joint for pneumatics

(2) Definition of flow characteristics

Effective area *S*: The flow ability of a component, represented by its equivalent "ideal" cross sectional area. This effective area is calculated under sonic conditions by measuring pressure loss in an air tank. Like sonic conductance *C*, the effective area is a method of expressing the flow rate of a product.

(3) Formula of flow rate

When

$$\frac{P_2 + 0.1}{P_1 + 0.1} \leq 0.5, \text{ choked flow}$$

$$Q = 120 \times S (P_1 + 0.1) \sqrt{\frac{293}{273 + t}} \dots\dots\dots(3)$$

When

$$\frac{P_2 + 0.1}{P_1 + 0.1} > 0.5, \text{ subsonic flow}$$

$$Q = 240 \times S \sqrt{(P_2 + 0.1)(P_1 - P_2)} \sqrt{\frac{293}{273 + t}} \dots\dots\dots(4)$$

Conversion with sonic conductance *C*:

$$S = 5.0 \times C \dots\dots\dots(5)$$

Q : Air flow rate [dm³/min(ANR)], the SI unit dm³ (cubic decimetre) is also allowed to be described by ℓ (litre)

S : Effective area [mm²]

*P*₁ : Upstream pressure [MPa]

*P*₂ : Downstream pressure [MPa]

t : Temperature [°C]

Note) Formula for subsonic flow (4) is only applicable when the critical pressure ratio *b* is unknown. It is the same as the formula for sonic conductance *C* (2) only when *b*=0.5

(4) Test method

Pipe the test equipment to the test circuit shown in Fig. (2). Fill the air tank with compressed air and keep the pressure at a constant level above 0.6MPa (0.5MPa). Then discharge the air until the pressure in the tank drops to 0.25MPa (0.2MPa). Measure the time required to discharge the air and the residual pressure in the air tank after leaving it until the pressure becomes stable in order to calculate the effective sectional area *S* by the following formula. Select the capacity of the air tank according to the effective sectional area of the test equipment. In the case of JIS B 8373, 8374, 8375, 8379, 8381, the pressure values are in parentheses and the coefficient of formula is 12.9.

$$S = 12.1 \frac{V}{t} \log_{10} \left(\frac{P_s + 0.1}{P + 0.1} \right) \sqrt{\frac{293}{T}} \dots\dots\dots(6)$$

S : Effective area [mm²]

V : Air tank capacity [dm³]

t : Discharging time [s]

*P*_s : Pressure inside air tank before discharging [MPa]

P : Residual pressure inside air tank after discharging [MPa]

T : Temperature inside air tank before discharging [K]

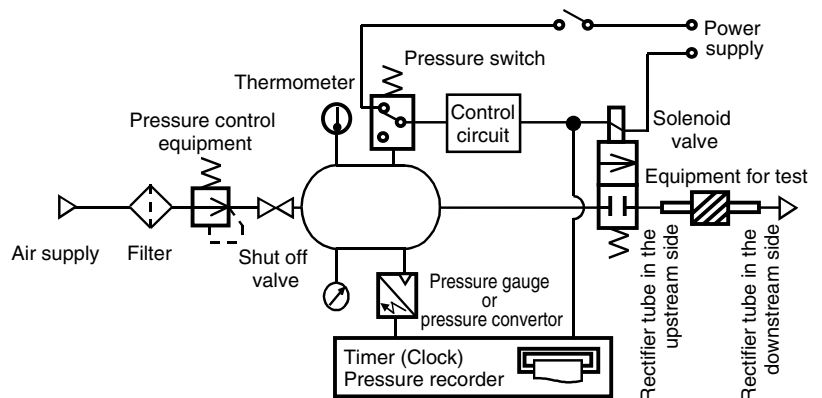


Fig. (2) Test circuit based on JIS B 8390

Solenoid Valves Flow Characteristics

2.3 Flow coefficient C_v factor

The United States Standard ANSI(NFPA)T3.21.3:1990: Pneumatic fluid power—Flow rating test procedure and reporting method for fixed orifice components

defines the flow coefficient C_v factor by the following formula which is based on testing conducted with a test circuit analogous to ISO 6358.

$$C_v = \frac{Q}{114.5 \sqrt{\frac{\Delta P (P_2 + P_a)}{T_1}}} \dots\dots\dots(7)$$

ΔP : Pressure drop between the static pressure tapping ports [bar]

P_1 : Pressure of the upstream tapping port [bar gauge]

P_2 : Pressure of the downstream tapping port [bar gauge]: $P_2 = P_1 - \Delta P$

Q : Flow rate [dm³/s standard condition]

P_a : Atmospheric pressure [bar absolute]

T_1 : Upstream absolute temperature [K]

Test conditions are $< P_1 + P_a = 6.5 \pm 0.2$ bar absolute, $T_1 = 297 \pm 5$ K, $0.07 \text{ bar} \leq \Delta P \leq 0.14$ bar.

This is the same concept as effective area A which ISO6358 stipulates as being applicable only when the pressure drop is small in relation to the upstream pressure so that the compression of air is negligible.

3. Equipment for process fluids

(1) Standards conforming to

IEC60534-2-3: 1997: Industrial process control valves. Part 2: Flow capacity, Section Three-Test procedures

JIS B 2005: 1995: Test method for the flow coefficient of a valve

Equipment standards: JIS B 8471: Regulator for water

JIS B 8472: Solenoid valve for steam

JIS B 8473: Solenoid valve for fuel oil

(2) Definition of flow characteristics

Av factor: It is the value representing the flow of clean water in m³/s which runs through a valve (equipment for test) when the pressure difference is 1 Pa. It is calculated using the following formula.

$$Av = Q \sqrt{\frac{\rho}{\Delta P}} \dots\dots\dots(8)$$

Av : Flow coefficient [m²]

Q : Flow rate [m³/s]

ΔP : Pressure difference [Pa]

ρ : Density of fluid [kg/m³]

(3) Formula of flow rate

It is described by the known unit. Also, the flow characteristics line shown in the Graph (2).

In the case of liquid:

$$Q = 1.9 \times 10^6 Av \sqrt{\frac{\Delta P}{G}} \dots\dots\dots(9)$$

Q : Flow rate [ℓ/min]

Av : Flow coefficient [m²]

ΔP : Pressure difference [MPa]

G : Relative density [water = 1]

In the case of saturated aqueous vapour:

$$Q = 8.3 \times 10^6 Av \sqrt{\Delta P (P_2 + 0.1)} \dots\dots\dots(10)$$

Q : Flow rate [kg/h]

Av : Flow coefficient [m²]

ΔP : Pressure difference [MPa]

P_1 : Upstream pressure [MPa]: $\Delta P = P_1 - P_2$

P_2 : Downstream pressure [MPa]

Solenoid Valves Flow Characteristics

(How to indicate flow characteristics)

Conversion of flow coefficient:


$$AV = 28 \times 10^{-6} KV = 24 \times 10^{-6} CV \dots\dots\dots(11)$$

Here,

KV factor: It is the value representing the flow rate of clean water in m³/h which runs through the valve at 5 to 40°C, when the pressure difference is 1 bar.

CV factor (Reference values): It is the value representing the flow rate of clean water in US gal/min which runs through the valve at 60°F, when the pressure difference is 1 lbf/in² (psi).

Values of pneumatic **KV** are different from **CV** because the testing method is different from each other.

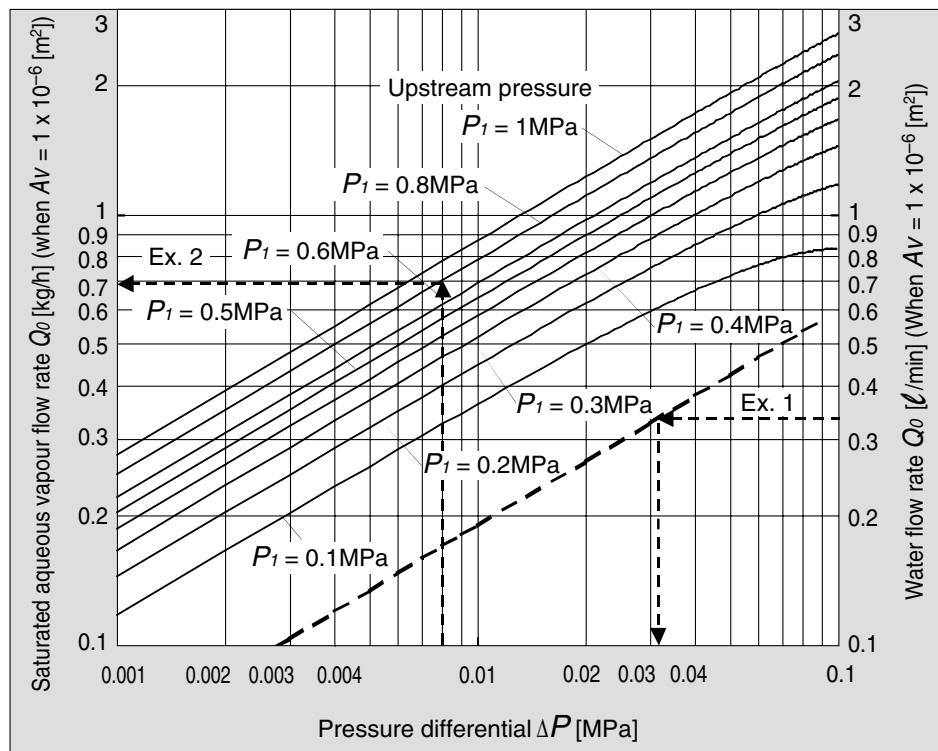

Graph (2) Flow characteristics line

Example 1)

Obtain the pressure difference when 15 [l/min] of water runs through the solenoid valve with an $AV = 45 \times 10^{-6} [m^2]$. Since $Q_0 = 15/45 = 0.33 [l/min]$, according to the Graph (2), if reading ΔP when Q_0 is 0.33, it will be 0.031 [MPa].

Example 2)

Obtain the flow rate of saturated aqueous vapour when $P_1 = 0.8 [MPa]$, $\Delta P = 0.008 [MPa]$ with a solenoid valve with an $AV = 1.5 \times 10^{-6} [m^2]$.

According to the Graph (2), if reading Q_0 when P_1 is 0.8 and ΔP is 0.008, it is 0.7 [kg/h]. Hence, the flow rate $Q = 0.7 \times 1.5 = 1.05 [kg/h]$.

Solenoid Valves Flow Characteristics

(4) Test method

By attaching the equipment for testing with the test circuit shown in Fig. (3) and running water at 5 to 40°C, measure the flow rate with a pressure difference of 0.075 MPa. However, the pressure difference needs to be set with a large enough difference so that the Reynolds number does not go below a range of 4×10^4 .

By substituting the measurement results for formula (8) to figure out Av .


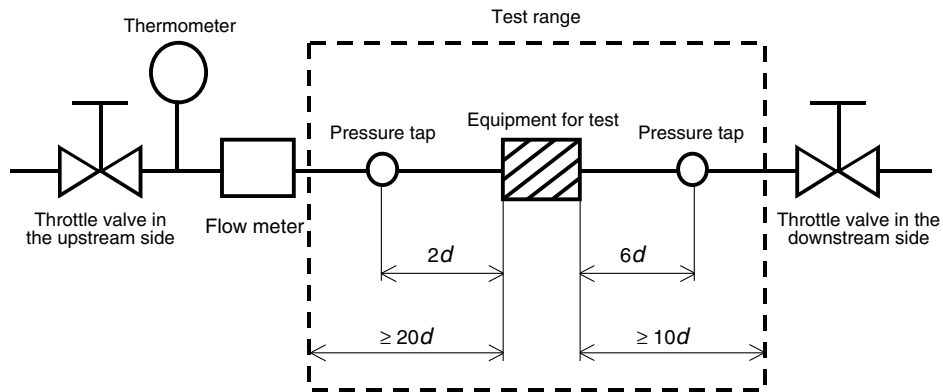


Fig. (3) Test circuit based on IEC60534-2-3, JIS B 2005

Flow Characteristics

Note) Use this graph as a guide. In the case of obtaining an accurate flow rate, refer to front matter pages 1 to 6.

For Air

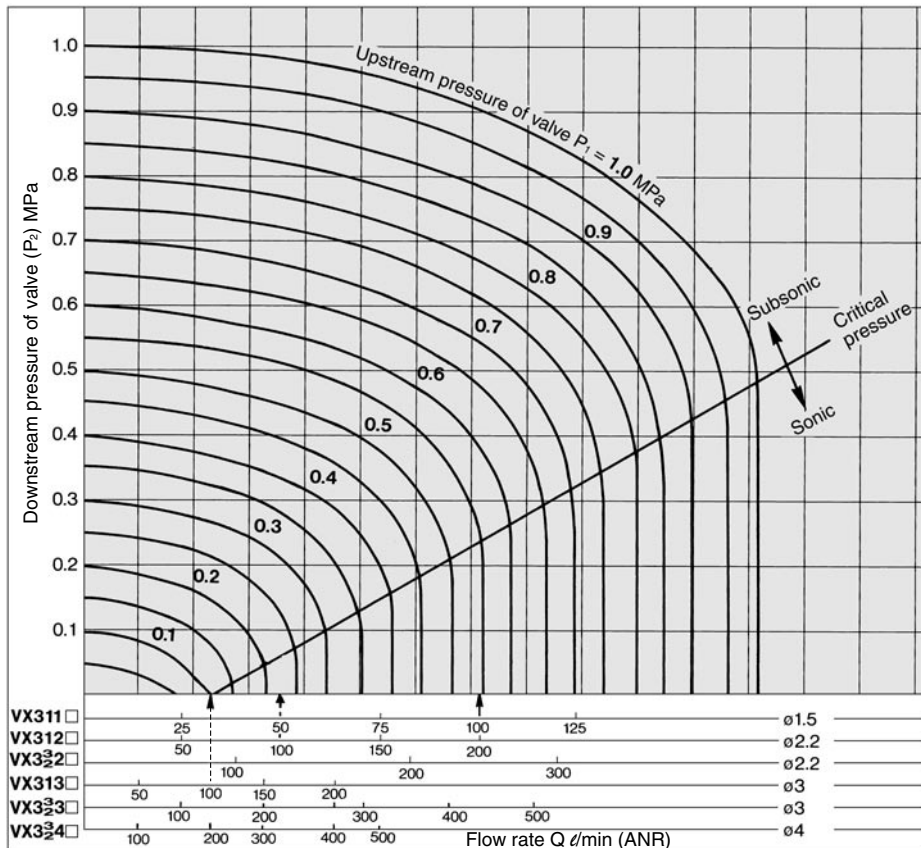

How to read the graph


The sonic range pressure to generate a flow rate of 100 l/min (ANR) is

$P_1 \approx 0.1$ MPa for a ø3 orifice (VX313□),

$P_1 \approx 0.23$ MPa for a ø2.2 orifice (VX312□), and

$P_1 \approx 0.55$ MPa for a ø1.5 orifice (VX311□).

For Water

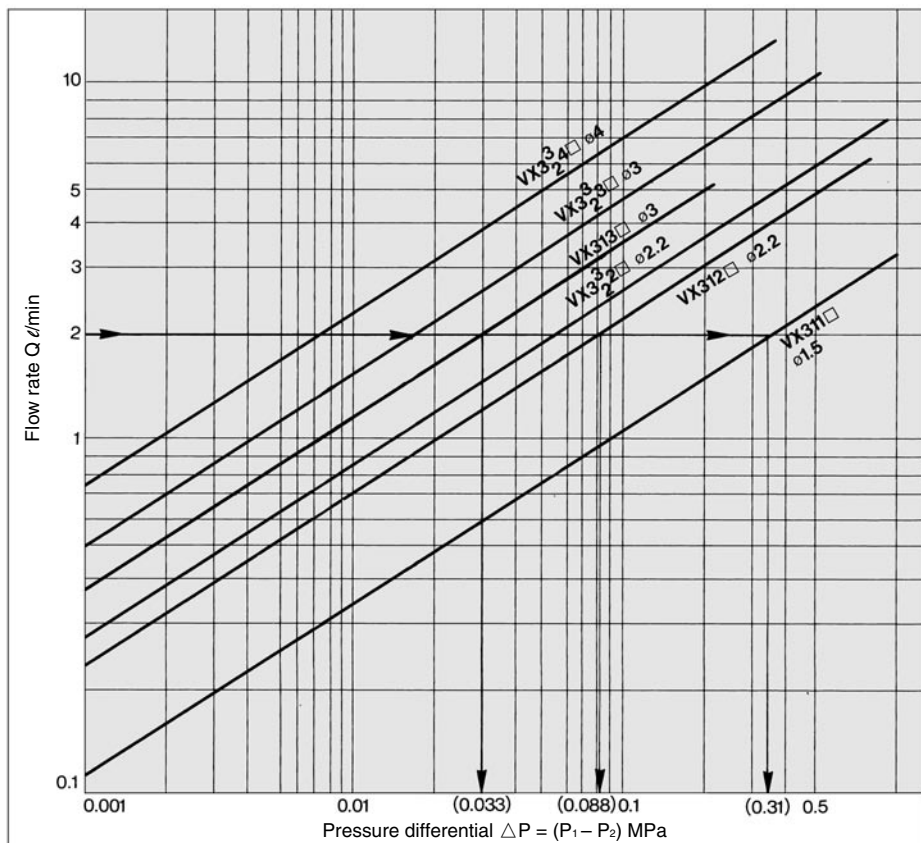

How to read the graph

When a water flow of 2 l/min is generated,


$\Delta P \approx 0.033$ MPa for a ø3 orifice (VX313□),

$\Delta P \approx 0.088$ MPa for a ø2.2 orifice (VX312□), and

$\Delta P \approx 0.31$ MPa for a ø1.5 orifice (VX311□).

Applicable Fluid Check List

Single Unit Series VX31/32/33



All Options (Single Unit)

| Option symbol | Seal material | | Body material /Shading coil material | Guide pin material | Coil insulation type | Note |
|---------------|-------------------|-------------|--------------------------------------|--------------------|----------------------|-----------------------|
| | Main valve poppet | Fixed Seals | | | | |
| Standard | NBR | NBR | Brass (C37) | PPS | B | — |
| A | FKM | FKM | | | | |
| B | EPDM | EPDM | | | | |
| C | FFKM | PTFE | Brass (C37)/ Copper | Stainless steel | H | |
| D | FKM | FKM | | | | |
| E | EPDM | EPDM | Stainless steel | PPS | — | |
| G | NBR | NBR | | | | |
| H | FKM | FKM | | | | |
| J | EPDM | EPDM | | | | |
| K | FFKM | PTFE | | Stainless steel | B | Oil free |
| M | FKM | FKM | | PPS | | Non-leak, Oil free |
| N | FKM | FKM | Stainless steel/Silver | Stainless steel | H | — |
| P | EPDM | EPDM | | | | |
| Q | FFKM | PTFE | | | | |
| S | FFKM | PTFE | Brass (C37)/ Copper | | | Steam (Max. 183°C) |
| V | FKM | FKM | Brass (C37) | PPS | B | Non-leak, Oil free |

* "K", "M", "V" options are for non-lube treatment.

Fluid Name and Option (Single Unit)

| Fluid (Application) | Option symbol and body material | |
|--|---------------------------------|-----------------|
| | Brass (C37) | Stainless steel |
| Caustic soda (25% ≥) | — | J |
| Gas oil | A | H |
| Silicon oil | A | H |
| Steam system (Steam) (Max. 183°C) | S | Q |
| Steam system (Condensation) (Max. 99°C) | E | P |
| Vacuum system (for pad) | Standard | — |
| Medium vacuum (up to 0.1 Pa.abs) | V | M |
| Perchloroethylene | A | H |
| Helium | V | M |
| Non-leak (10 ⁻⁶ Pa·m ³ /s) | V | M |
| Heated water (Max. 99°C) | E | P |

Note 1) The leakage amount (10⁻⁶Pa·m³/s) of "V", "M" options are values when differential pressure is 0.1 MPa.
Note 2) If using for other fluids, contact SMC.

Manifold Series VVX31/32/33



All Options (Manifold)

| Option symbol | Seal material | | Body material /Shading coil material | Guide pin material | Coil insulation type | Note |
|---------------|-------------------|-------------|--------------------------------------|--------------------|----------------------|------|
| | Main valve poppet | Fixed seals | | | | |
| Standard | NBR | NBR | Brass (C37) | PPS | B | — |
| A | FKM | FKM | | | | |
| B | EPDM | EPDM | | | | |
| D | FKM | FKM | Brass (C37)/ Copper | Stainless steel | H | |
| E | EPDM | EPDM | | | | |
| V | FKM | FKM | Brass (C37) | PPS | B | |

* Aluminum is the only available material for the manifold base.

Fluid Name and Option (Manifold)

| Fluid (Application) | Option symbol |
|--|---------------|
| Gas oil | A |
| Silicon oil | A |
| Vacuum system (for pad) | Standard |
| Medium vacuum (up to 0.1 Pa.abs) | V |
| Perchloroethylene | A |
| Helium | V |
| Non-leak (10 ⁻⁶ Pa·m ³ /s) | V |

Note 1) The leakage amount (10⁻⁶Pa·m³/s) of "V" options are values when differential pressure is 0.1 MPa.
Note 2) If using for other fluids, contact SMC.

Glossary of Terms

Pressure Terminology

1. Maximum operating pressure differential

The maximum pressure differential (the difference between the inlet and outlet pressure) which is allowed for operation, with the valve closed or open. When the downstream pressure is 0 MPa, this becomes the maximum operating pressure.

2. Minimum operating pressure differential

The minimum pressure differential (difference between the inlet pressure and the outlet pressure) required to keep the main valve fully opened.

3. Maximum system pressure

The maximum pressure that can be applied inside the pipelines (line pressure).
(The pressure differential of the solenoid valve unit must be less than the maximum operating pressure differential.)

4. Withstand pressure

The pressure which must be withstood without a drop in performance after returning to the operating pressure range. (value under the prescribed conditions)

Electrical Terminology

1. Apparent power (VA)

Volt-ampere is the product of voltage (V) and current (A). Power dissipation (W): For AC, $W = V \cdot A \cdot \cos\theta$. For DC, $W = V \cdot A$.
(Note) $\cos\theta$ shows power factor. $\cos\theta = 0.6$

2. Surge voltage

A high voltage which is momentarily generated in the shut-off unit by shutting off the power.

3. Degree of protection

A degree defined in the "JIS C 0920: Waterproof test of electric machinery/appliance and the degree of protection against the intrusion of solid foreign objects".

IP65: Dust-tight, Low jetproof type

"Low jetproof type" means that no water intrudes inside the equipment that could hinder it from operating normally by means of discharging water for 3 minutes in the prescribed manner. Take appropriate protection measures, since a device is not usable in an environment where a water drop is splashed.

Others

1. Material

NBR: Nitrile rubber

FKM: Fluoro rubber – Trade names: Viton®, Dai-el®, etc.

EPDM: Ethylene propylene rubber

PTFE: Polytetrafluoroethylene resin – Trade names: Teflon®, Polyflon®, etc.

FFKM: Perfluoroelastomer

Trade names: Kalrez®, Chemraz®

2. Oil free treatment

The degreasing and washing of wetted parts.

3. Passage symbol

In the JIS symbol ($\square \square \square \square$) IN and OUT are in a blocked condition ($\frac{\square}{\square}$), but actually in the case of reverse pressure (OUT>IN), there is a limit to the blocking.

(\triangle) is used to indicate that blocking of reverse pressure is not possible.

Direct Operated 3 Port Solenoid Valve

Series VX31/32/33

For Water, Oil, Steam, Air



Single Unit

Valve

Normally closed (N.C.)
Normally open (N.O.)
Common (COM.)

Solenoid Coil

Coil: Class B, Class H

Rated Voltage

100 VAC, 200 VAC, 110 VAC,
220 VAC, 240 VAC, 230 VAC,
48 VAC, 24 VDC, 12 VDC

Material

Body — Brass, Stainless steel
Seal — NBR, FKM, EPDM, PTFE, FFKM

Electrical Entry

- Grommet
- Conduit
- DIN terminal
- Conduit terminal



Normally Closed (N.C.) /
Normally Open (N.O.) /
Common (COM.)

| Model | VX31 | VX32 | VX33 |
|--------------|----------|----------|----------|
| Orifice size | 1.5 mmø | ● | — |
| | 2.2 mmø | ● | ● |
| | 3 mmø | ● | ● |
| | 4 mmø | — | ● |
| Port size | 1/8, 1/4 | 1/4, 3/8 | 1/4, 3/8 |



Manifold

Valve

Normally closed (N.C.)
Normally open (N.O.)
Common (COM.)

Base

Common SUP/EXH type

Solenoid Coil

Coil: Class B, Class H

Rated Voltage


100 VAC, 200 VAC, 110 VAC,
220 VAC, 240 VAC, 230 VAC,
48 VAC, 24 VDC, 12 VDC

Material

Body — Brass
Base — Aluminum
Seal — NBR, FKM, EPDM

Electrical Entry

- Grommet
- Conduit
- DIN terminal
- Conduit terminal

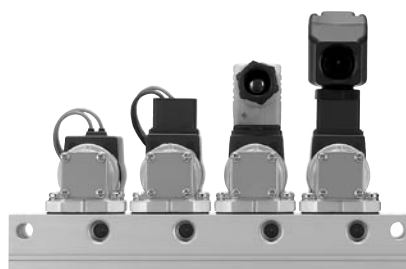

Normally Closed (N.C.) /
Normally Open (N.O.) /
Common (COM.)

| Model | VX31 | VX32 | VX33 |
|------------------------------------|----------|----------|------|
| Orifice size | 1.5 mmø | ● | — |
| | 2.2 mmø | ● | ● |
| | 3 mmø | ● | ● |
| | 4 mmø | — | ● |
| (Common SUP/EXH type) Port size | IN port | 1/4 | |
| | OUT port | 1/8, 1/4 | |
| | EXH port | 1/4 | |

Series VX31/32/33

Standard Specifications

| | | | |
|----------------------|-------------------------------|---|--|
| Valve specifications | Valve construction | | Direct operated poppet |
| | Withstand pressure (MPa) | | 3.0 |
| | Body material | | Brass (C37), Stainless steel |
| | Seal material | | NBR, FKM, EPDM, PTFE, FFKM |
| | Enclosure | | Dust-tight, Low jetproof (equivalent to IP65)* |
| Environment | | Location without corrosive or explosive gases | |
| Coil specifications | Rated voltage | AC (Class B coil, with full-wave rectifier) | 100 VAC, 200 VAC, 110 VAC, 220 VAC, 230 VAC, 240 VAC, 48 VAC |
| | | AC (Class H coil) | |
| | | DC | |
| | Allowable voltage fluctuation | | 24 VDC, 12 VDC |
| | | | ±10% of rated voltage |
| | Allowable leakage voltage | AC (Class B coil, with full-wave rectifier) | ±5% or less of rated voltage |
| | | AC (Class H coil) | ±20% or less of rated voltage |
| DC | | ±2% or less of rated voltage | |
| Coil insulation type | | Class B, Class H | |

* Electrical entry, Grommet with surge voltage suppressor (GS) has a rating of IP40.

Solenoid Coil Specifications

DC Specification

| Model | Power consumption (W) | Temperature rise (C°) ^{Note)} |
|-------|-----------------------|--|
| VX31 | 4.5 | 45 |
| VX32 | 7 | 45 |
| VX33 | 10.5 | 60 |

Note) The values are for an ambient temperature of 20°C and at the rated voltage.

AC Specification (Class B coil, with full-wave rectifier)

| Model | Apparent power (VA)* | Temperature rise (C°) ^{Note)} |
|-------|----------------------|--|
| VX31 | 7 | 55 |
| VX32 | 9.5 | 60 |
| VX33 | 12 | 65 |

* There is no difference in the frequency and the inrush and energised apparent power, since a rectifying circuit is used in the AC (Class B) coil.

Note) The values are for an ambient temperature of 20°C and at the rated voltage.

AC Specification (Class H coil)

| Model | Frequency (Hz) | Apparent power (VA) | | Temperature rise (C°) ^{Note)} |
|-------|----------------|---------------------|-----------|--|
| | | Inrush | Energised | |
| VX31 | 50 | 33 | 14 | 65 |
| | 60 | 28 | 12 | 60 |
| VX32 | 50 | 65 | 33 | 100 |
| | 60 | 55 | 27 | 95 |
| VX33 | 50 | 94 | 50 | 120 |
| | 60 | 79 | 41 | 115 |

Note) The values are for an ambient temperature of 20°C and at the rated voltage.

How to Order Solenoid Coil Assembly

DC Coil

VX02 **1**N-**5**G

| | |
|-----------------------|--------|
| Series | |
| 1 | VX31□□ |
| 2 | VX32□□ |
| 3 | VX33□□ |
| Rated voltage Note 1) | |
| 5 | 24 VDC |
| 6 | 12 VDC |

Note 1) Refer to Table (1) for the available combinations.

Electrical entry

| | |
|--|---|
| G - Grommet GS - With grommet surge voltage suppressor | C - Conduit |
| T - With conduit terminal TS - With conduit terminal and surge voltage suppressor TL - With conduit terminal and light TZ - With conduit terminal, surge voltage suppressor and light | D - DIN DS - DIN with surge voltage suppressor DL - DIN with light DZ - DIN with surge voltage suppressor and light DO - For DIN (without connector) |

* Refer to Table (1) for the available combinations between each electrical option and rated voltage.

AC/Class B coil (with full-wave rectifier)

VX02 **1**N-**1**GR

| | | | |
|--------|--------|-----------------------|------------------|
| Series | | Rated voltage Note 1) | |
| 1 | VX31□□ | 1 | 100 VAC 50/60 Hz |
| 2 | VX32□□ | 2 | 200 VAC 50/60 Hz |
| 3 | VX33□□ | 3 | 110 VAC 50/60 Hz |
| | | 4 | 220 VAC 50/60 Hz |
| | | 7 | 240 VAC 50/60 Hz |
| | | 8 | 48 VAC 50/60 Hz |
| | | J | 230 VAC 50/60 Hz |

Note 1) Refer to Table (1) for the available combinations.

Electrical entry

| | |
|---|---|
| G - Grommet | C - Conduit |
| T - With conduit terminal TL - With conduit terminal and light | D - DIN DL - DIN with light DO - For DIN (without connector) |

* Refer to Table (1) for the available combinations between each electrical option and rated voltage.
 * Surge voltage suppressor is integrated into the AC/Class B coil as standard.

AC/Class H coil

VX02 **1**N-**1**G-H-Z

| | |
|-----------------------|------------------|
| Series | |
| 1 | VX31□□ |
| 2 | VX32□□ |
| 3 | VX33□□ |
| Rated voltage Note 1) | |
| 1 | 100 VAC 50/60 Hz |
| 2 | 200 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz |
| 7 | 240 VAC 50/60 Hz |
| 8 | 48 VAC 50/60 Hz |
| J | 230 VAC 50/60 Hz |

Note 1) Refer to Table (1) for the available combinations.

Electrical entry

| | |
|--|--------------------|
| G - Grommet GS - With grommet surge voltage suppressor | C - Conduit |
| T - With conduit terminal TS - With conduit terminal and surge voltage suppressor TL - With conduit terminal and light TZ - With conduit terminal, surge voltage suppressor and light | |

* Refer to Table (1) for the available combinations between each electrical option and rated voltage.

Table (1) Rated Voltage – Electrical Option


| Rated voltage | | | Class B | | | Class H | | |
|---------------|----------------|---------|------------------------------------|-----------------|--|------------------------------------|-----------------|--|
| AC/DC | Voltage symbol | Voltage | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor |
| AC | 1 | 100 V | Note 1) | ● | Note 1) | ● | ● | ● |
| | 2 | 200 V | | ● | | ● | | |
| | 3 | 110 V | | ● | | ● | | |
| | 4 | 220 V | | ● | | ● | | |
| | 7 | 240 V | | — | | — | | |
| | 8 | 48 V | | — | | — | | |
| DC | J | 230 V | — | — | ● | — | — | |
| | 5 | 24 V | ● | ● | ● | DC specification is not available. | | |
| | 6 | 12 V | ● | — | — | | | |

Note 1) Option S, Z are not available as a surge voltage suppressor is integrated into the AC/Class B coil as standard.
 * When changing coils, AC/DC are not interchangeable with each other, and Class B and H coils are also not interchangeable with each other.

• Name plate part no.

AZ-T-VX **Valve model**

↑ Enter by referring to "How to Order".

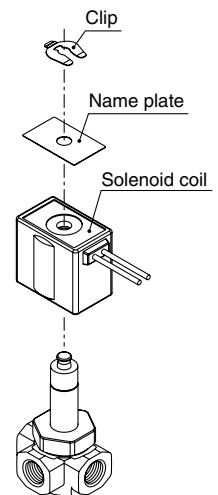

• Clip part no.

For VX31: VX021N-10
 For VX32: VX022N-10
 For VX33: VX023N-10


Series VX31/32/33

For Water /Single Unit

Model/Valve Specifications


N.C.

Passage symbol




N.O.

Passage symbol



COM.

Passage symbol



| Port size | Orifice size (mmø) | Model | Max. operating pressure differential (MPa) | | | Flow characteristics | | Max. system pressure (MPa) | Weight (g) ^{Note)} |
|-----------|--------------------|-----------|--|------|------|--------------------------------------|--------------|----------------------------|-----------------------------|
| | | | N.C. | N.O. | COM. | Av x 10 ⁻⁶ m ² | Cv converted | | |
| 1/8 (6A) | 1.5 | VX311□-01 | 1 | 1 | 0.7 | 1.9 | 0.08 | 380 | |
| | 2.2 | VX312□-01 | 0.7 | 0.5 | 0.4 | 3.8 | 0.16 | | |
| | 3 | VX313□-01 | 0.3 | 0.3 | 0.2 | 5.8 | 0.24 | | |
| 1/4 (8A) | 1.5 | VX311□-02 | 1 | 1 | 0.7 | 1.9 | 0.08 | | |
| | | VX312□-02 | 0.7 | 0.5 | 0.4 | 3.8 | 0.16 | | |
| | | VX332□-02 | 1.2 | 1 | 0.7 | 4.6 | 0.19 | | |
| | VX332□-02 | 1.6 | 1.6 | 1 | | | | | |
| | 3 | VX313□-02 | 0.3 | 0.3 | 0.2 | 5.8 | 0.24 | | |
| | | VX323□-02 | 0.6 | 0.5 | 0.3 | 7.9 | 0.33 | | |
| | | VX333□-02 | 1 | 0.9 | 0.6 | | | | |
| | 4 | VX324□-02 | 0.3 | 0.25 | 0.2 | 12 | 0.50 | | |
| VX334□-02 | | 0.5 | 0.4 | 0.3 | | | | | |
| 3/8 (10A) | 2.2 | VX322□-03 | 1.2 | 1 | 0.7 | 4.6 | 0.19 | 530 | |
| | | VX332□-03 | 1.6 | 1.6 | 1 | | | 730 | |
| | 3 | VX323□-03 | 0.6 | 0.5 | 0.3 | 7.9 | 0.33 | 530 | |
| | | VX333□-03 | 1 | 0.9 | 0.6 | | | 730 | |
| | | VX324□-03 | 0.3 | 0.25 | 0.2 | | | 530 | |
| | 4 | VX334□-03 | 0.5 | 0.4 | 0.3 | 12 | 0.50 | 730 | |



Note) Weight of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for terminal type respectively.

Also, add 60 g for VX31□□, 80 g for VX32□□ and VX33□□ respectively for bracket option.

• Refer to "Glossary of Terms" on front matter 9, for details on the max. operating pressure differential and the max. system pressure.

Operating Fluid and Ambient Temperature

| Power source | Operating fluid temperature (°C) | | Ambient temperature (°C) |
|-----------------|----------------------------------|---------|--------------------------|
| | Solenoid valve option (symbol) | | |
| | Standard, G, H | E, P | |
| DC/AC (Class B) | 1 to 60 | — | -20 to 60 |
| AC (Class H) | — | 1 to 99 | -20 to 60 |



Note) With no freezing.

Tightness of Valve (Leakage Rate)

| Seal material | Max. operating pressure differential | Leakage rate (With water pressure) |
|----------------|--------------------------------------|------------------------------------|
| NBR, FKM, EPDM | From 0 to less than 1 MPa | 0.1 cm ³ /min or less |
| | 1 MPa or more | 0.2 cm ³ /min or less |

Direct Operated 3 Port Solenoid Valve Series VX31/32/33

For Water/Single Unit

How to Order (Single Unit)

DC, AC/Class H coil VX 31 1 4 [] [] 01 [] 1 G 1 []

AC/Class B coil (with full-wave rectifier) VX 31 1 4 [] [] 01 [] 1 G R1 []

Model Refer to Table (1) shown below for availability.

Orifice size Refer to Table (1) shown below for availability.

Valve/Body configuration

| | |
|---|--------------------|
| 0 | N.C. / Single unit |
| 2 | N.O. / Single unit |
| 4 | COM. / Single unit |

Solenoid valve option Refer to Table (2) shown below for availability.

Port size Refer to Table (1) shown below for availability.

Thread type

| | |
|---|------|
| - | Rc |
| T | NPTF |
| F | G |
| N | NPT |

Suffix

| | |
|---|----------|
| - | - |
| Z | Oil free |

Rated voltage

| | | | |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC | | |

* Refer to Table (3) shown below for availability.

Refer to page 3 for ordering coil only.

Bracket

| | |
|---|--------------|
| - | None |
| B | With bracket |

* Bracket is not removable.

With full-wave rectifier, surge voltage suppressor

Electrical entry

G - Grommet
GS - With grommet surge voltage suppressor

C - Conduit

T - With conduit terminal
TS - With conduit terminal and surge voltage suppressor
TL - With conduit terminal and light
TZ - With conduit terminal, surge voltage suppressor and light

D - DIN
DS - DIN with surge voltage suppressor
DL - DIN with light
DZ - DIN with surge voltage suppressor and light
DO - For DIN (without connector)

* DIN type is available with class B insulation only.

For Water

For Oil

For Steam

For Air

Table (1) Port/Orifice Size

| Model | Solenoid valve | | | Orifice symbol (diameter) | | | |
|-------------------------|----------------|----------|----------|---------------------------|----------------|--------------|--------------|
| | VX31 | VX32 | VX33 | 1 (1.5 mmø) | 2 (2.2 mmø) | 3 (3 mmø) | 4 (4 mmø) |
| Port no. (Port size) | 01 (1/8) | - | - | ● | ● | ● | - |
| | 02 (1/4) | - | - | ● | ● | ● | - |
| | - | 02 (1/4) | 02 (1/4) | - | ● | ● | ● |
| | - | 03 (3/8) | 03 (3/8) | - | ● | ● | ● |

Table (2) Solenoid Valve Option

| Option symbol | Seal material | | Body material/ Shading coil material | Guide pin material | Coil insulation type | Note |
|---------------|-------------------|-------------|---|--------------------|----------------------|--------------|
| | Main valve poppet | Fixed seals | | | | |
| - | NBR | NBR | Brass (C37) | PPS | B | - |
| G | NBR | NBR | Stainless steel | | | |
| E | EPDM | EPDM | Brass (C37)/Copper | Stainless steel | H | Heated water |
| P | EPDM | EPDM | Stainless steel/Silver | | | |
| H | FKM | FKM | Stainless steel | PPS | B | - |

Table (3) Rated Voltage – Electrical Option

| AC/DC | Rated voltage | | Class B | | |
|-------|----------------|---------|------------------------------------|-----------------|--|
| | Voltage symbol | Voltage | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor |
| AC | 1 | 100 V | ● | ● | - |
| | 2 | 200 V | ● | ● | - |
| | 3 | 110 V | ● | ● | - |
| | 4 | 220 V | Note 1) | ● | Note 1) |
| | 7 | 240 V | ● | - | - |
| | 8 | 48 V | ● | - | - |
| | J | 230 V | ● | - | - |
| DC | 5 | 24 V | ● | ● | ● |
| | 6 | 12 V | ● | - | - |


Note 1) Option S, Z are not available as a surge voltage suppressor is integrated into the AC/Class B coil as standard.

| AC/DC | Rated voltage | | Class H | | |
|-------|----------------|---------|------------------------------------|-----------------|--|
| | Voltage symbol | Voltage | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor |
| AC | 1 | 100 V | ● | ● | ● |
| | 2 | 200 V | ● | ● | ● |
| | 3 | 110 V | ● | ● | ● |
| | 4 | 220 V | ● | ● | ● |
| | 7 | 240 V | ● | - | - |
| | 8 | 48 V | ● | - | - |
| | J | 230 V | ● | - | - |
| DC | 5 | 24 V | DC specification is not available. | | |
| | 6 | 12 V | DC specification is not available. | | |

Series VX31/32/33

For Oil /Single Unit

Model/Valve Specifications

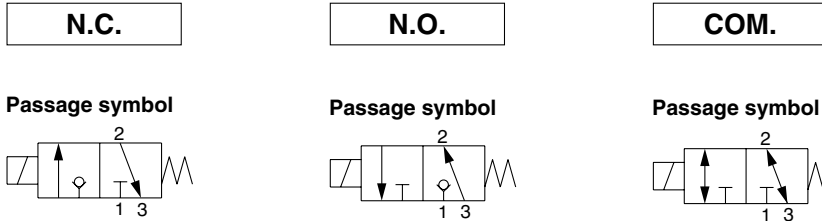

| Port size | Orifice size (mmø) | Model | Max. operating pressure differential (MPa) | | | Flow characteristics | | Max. system pressure (MPa) | Weight (g) ^{Note)} | |
|-----------|--------------------|-----------|--|------|------|--------------------------------------|--------------|----------------------------|-----------------------------|-----|
| | | | N.C. | N.O. | COM. | Av x 10 ⁻⁶ m ² | Cv converted | | | |
| 1/8 (6A) | 1.5 | VX311□-01 | 1 | 1 | 0.7 | 1.9 | 0.08 | 2.0 | 380 | |
| | 2.2 | VX312□-01 | 0.7 | 0.5 | 0.4 | 3.8 | 0.16 | | | |
| | 3 | VX313□-01 | 0.3 | 0.3 | 0.2 | 5.8 | 0.24 | | | |
| 1/4 (8A) | 1.5 | VX311□-02 | 1 | 1 | 0.7 | 1.9 | 0.08 | | 530 | |
| | | VX312□-02 | 0.7 | 0.5 | 0.4 | 3.8 | 0.16 | | | |
| | | VX322□-02 | 1.2 | 1 | 0.7 | 4.6 | 0.19 | | | |
| | 2.2 | VX332□-02 | 1.6 | 1.6 | 1 | 5.8 | 0.24 | | | 730 |
| | | VX313□-02 | 0.3 | 0.3 | 0.2 | | | | | |
| | | VX323□-02 | 0.6 | 0.5 | 0.3 | | | | | |
| | 3 | VX333□-02 | 1 | 0.9 | 0.6 | 7.9 | 0.33 | 530 | | |
| | | VX324□-02 | 0.3 | 0.25 | 0.2 | 12 | 0.50 | 530 | | |
| VX334□-02 | | 0.5 | 0.4 | 0.3 | 730 | | | | | |
| 3/8 (10A) | 2.2 | VX322□-03 | 1.2 | 1 | 0.7 | 4.6 | 0.19 | 530 | | |
| | | VX332□-03 | 1.6 | 1.6 | 1 | | | 730 | | |
| | 3 | VX323□-03 | 0.6 | 0.5 | 0.3 | 7.9 | 0.33 | 530 | | |
| | | VX333□-03 | 1 | 0.9 | 0.6 | | | 730 | | |
| | | VX324□-03 | 0.3 | 0.25 | 0.2 | | | 530 | | |
| | 4 | VX334□-03 | 0.5 | 0.4 | 0.3 | 12 | 0.50 | 730 | | |

Note) Weight of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for terminal type respectively.
 Also, add 60 g for VX31□□, 80 g for VX32□□ and VX33□□ respectively for bracket option.

• Refer to "Glossary of Terms" on front matter 9, for details on the max. operating pressure differential and the max. system pressure.

Operating Fluid and Ambient Temperature

| Power source | Operating fluid temperature (°C) | | Ambient temperature (°C) |
|-----------------|----------------------------------|----------------------------|--------------------------|
| | Solenoid valve option (symbol) | | |
| | A, H | D, N | |
| DC/AC (Class B) | -5 ^{Note)} to 60 | — | -20 to 60 |
| AC (Class H) | — | -5 ^{Note)} to 120 | -20 to 60 |

Note) Kinematic viscosity: 50 mm²/s or less.

Tightness of Valve (Leakage Rate)

| Seal material | Max. operating pressure differential | Leakage rate (With oil pressure) |
|---------------|--------------------------------------|----------------------------------|
| FKM | From 0 to less than 1 MPa | 0.1 cm ³ /min or less |
| | 1 MPa or more | 0.2 cm ³ /min or less |

How to Order (Single Unit)

DC, AC/Class H coil

AC/Class B coil (with full-wave rectifier)

VX 31 1 4 A [] 01 [] 1 G 1 []

VX 31 1 4 A [] 01 [] 1 G R1 []

Bracket

| | |
|---|--------------|
| - | None |
| B | With bracket |

* Bracket is not removable.

Model • Refer to Table (1) shown below for availability.

Orifice size • Refer to Table (1) shown below for availability.

Valve/Body configuration •

| | |
|---|--------------------|
| 0 | N.C. / Single unit |
| 2 | N.O. / Single unit |
| 4 | COM. / Single unit |

Solenoid valve option • Refer to Table (2) shown below for availability.

Port size • Refer to Table (1) shown below for availability.

Thread type •

| | |
|---|------|
| - | Rc |
| T | NPTF |
| F | G |
| N | NPT |

Suffix •

| | |
|---|----------|
| - | - |
| Z | Oil free |

Rated voltage •

| | | | |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC | | |

* Refer to Table (3) shown below for availability.

Refer to page 3 for ordering coil only.

Electrical entry •

| | |
|---|---|
| <p>G - Grommet</p> <p>GS - With grommet surge voltage suppressor</p> | <p>C - Conduit</p> |
| <p>T - With conduit terminal</p> <p>TS - With conduit terminal and surge voltage suppressor</p> <p>TL - With conduit terminal and light</p> <p>TZ - With conduit terminal, surge voltage suppressor and light</p> | <p>D - DIN</p> <p>DS - DIN with surge voltage suppressor</p> <p>DL - DIN with light</p> <p>DZ - DIN with surge voltage suppressor and light</p> <p>DO - For DIN (without connector)</p> <p>* DIN type is available with class B insulation only.</p> |

* Refer to Table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.

* Surge voltage suppressor is integrated into the AC/Class B coil as standard.

For Water

For Oil

For Steam

For Air

Table (1) Port/Orifice Size

| Solenoid valve | | Orifice symbol (diameter) | | | | | |
|-------------------------|----------|---------------------------|----------------|--------------|--------------|---|---|
| | | 1 (1.5 mmø) | 2 (2.2 mmø) | 3 (3 mmø) | 4 (4 mmø) | | |
| Model | VX31 | VX32 | VX33 | | | | |
| Port no. (Port size) | 01 (1/8) | - | - | ● | ● | ● | - |
| | 02 (1/4) | - | - | ● | ● | ● | - |
| | - | 02 (1/4) | 02 (1/4) | - | ● | ● | ● |
| | - | 03 (3/8) | 03 (3/8) | - | ● | ● | ● |

Table (2) Solenoid Valve Option

| Option symbol | Seal material | | Body material/ Shading coil material | Guide pin material | Coil insulation type |
|---------------|-------------------|-------------|---|--------------------|----------------------|
| | Main valve poppet | Fixed seals | | | |
| A | FKM | FKM | Brass (C37) | PPS | B |
| H | | | Stainless steel | | |
| D | | | Brass (C37)/Copper | Stainless steel | H |
| N | | | Stainless steel/Silver | | |

* The additives contained in oil are different depending on the type and manufacturers, so the durability of the seal materials will vary. For details, please consult with SMC.

Table (3) Rated Voltage – Electrical Option

| Rated voltage | | | Class B | | |
|---------------|----------------|---------|------------------------------------|-----------------|--|
| AC/DC | Voltage symbol | Voltage | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor |
| AC | 1 | 100 V | ● | ● | ● |
| | 2 | 200 V | ● | ● | ● |
| | 3 | 110 V | ● | ● | ● |
| | 4 | 220 V | Note 1) | ● | Note 1) |
| | 7 | 240 V | ● | - | - |
| | 8 | 48 V | ● | - | - |
| DC | J | 230 V | ● | - | - |
| | 5 | 24 V | ● | ● | ● |
| | 6 | 12 V | ● | - | - |


Note 1) Option S, Z are not available as a surge voltage suppressor is integrated into the AC/Class B coil as standard.

| Rated voltage | | | Class H | | |
|---------------|----------------|---------|------------------------------------|-----------------|--|
| AC/DC | Voltage symbol | Voltage | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor |
| AC | 1 | 100 V | ● | ● | ● |
| | 2 | 200 V | ● | ● | ● |
| | 3 | 110 V | ● | ● | ● |
| | 4 | 220 V | ● | ● | ● |
| | 7 | 240 V | ● | - | - |
| | 8 | 48 V | ● | - | - |
| DC | J | 230 V | ● | - | - |
| | 5 | 24 V | DC specification is not available. | | |
| | 6 | 12 V | DC specification is not available. | | |

Series VVX31/32/33

For Oil/Manifold

Solenoid Valve for Manifold/Valve Specifications

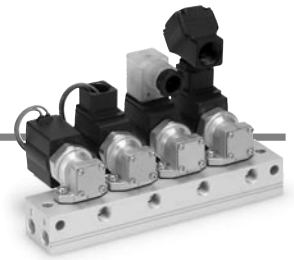


N.C.


N.O.

COM.


Passage symbol



Passage symbol



Passage symbol



| Orifice size (mmø) | Model | Max. operating pressure differential (MPa) | | | Flow characteristics | | Max. system pressure (MPa) |
|--------------------|-----------|--|------|------|--------------------------------------|--------------|----------------------------|
| | | N.C. | N.O. | COM. | Av x 10 ⁻⁶ m ² | Cv converted | |
| 1.5 | VX311□-00 | 1 | 1 | 0.7 | 1.9 | 0.08 | 2.0 |
| 2.2 | VX312□-00 | 0.7 | 0.5 | 0.4 | 3.8 | 0.16 | |
| | VX322□-00 | 1.2 | 1 | 0.7 | 4.6 | 0.19 | |
| | VX332□-00 | 1.6 | 1.6 | 1 | | | |
| 3 | VX313□-00 | 0.3 | 0.3 | 0.2 | 5.8 | 0.24 | |
| | VX323□-00 | 0.6 | 0.5 | 0.3 | 7.9 | 0.33 | |
| | VX333□-00 | 1 | 0.9 | 0.6 | | | |
| 4 | VX324□-00 | 0.3 | 0.25 | 0.2 | 12 | 0.50 | |
| | VX334□-00 | 0.5 | 0.4 | 0.3 | | | |



• Refer to "Glossary of Terms" on front matter 9 for details on the max. operating pressure differential and the max. system pressure.

Operating Fluid and Ambient Temperature

| Power source | Operating fluid temperature (°C) | | Ambient temperature (°C) |
|-----------------|----------------------------------|----------------------------|--------------------------|
| | Solenoid valve option (symbol) | | |
| | A | D | |
| DC/AC (Class B) | -5 ^{Note)} to 60 | — | -20 to 60 |
| AC (Class H) | — | -5 ^{Note)} to 120 | -20 to 60 |



Note) kinematic viscosity: 50 mm²/s or less.

Tightness of Valve (Leakage Rate)

| Seal material | Max. operating pressure differential | Leakage rate (With oil pressure) |
|---------------|--------------------------------------|----------------------------------|
| FKM | From 0 to less than 1 MPa | 0.1 cm ³ /min or less |
| | 1 MPa or more | 0.2 cm ³ /min or less |

How to Order (Solenoid Valve for Manifold)

DC, AC/Class H coil **VX 31 1 1 A** **00-1 G 1**

AC/Class B coil (with full-wave rectifier) **VX 31 1 1 A** **00-1 G R1**

Model • Refer to Table (1) shown below for availability.

Orifice size • Refer to Table (1) shown below for availability.

Valve/Body configuration

| | |
|---|-----------------|
| 1 | N.C. / Manifold |
| 3 | N.O. / Manifold |
| 5 | COM. / Manifold |

Solenoid valve option • Refer to Table (2) shown below for availability.

Rated voltage

| | | | |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC | | |

* Refer to Table (3) shown below for availability.


Suffix

| | |
|---|----------|
| - | — |
| Z | Oil free |


Refer to page 3 for ordering coil only.

Electrical entry


G - Grommet
GS - With grommet surge voltage suppressor




C - Conduit



T - With conduit terminal
TS - With conduit terminal and surge voltage suppressor
TL - With conduit terminal and light
TZ - With conduit terminal, surge voltage suppressor and light



D - DIN
DS - DIN with surge voltage suppressor
DL - DIN with light
DZ - DIN with surge voltage suppressor and light
DO - For DIN (without connector)



* DIN type is available with class B insulation only.

* Refer to Table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.
* Surge voltage suppressor is integrated into the AC/Class B coil as standard.

For Water

For Oil

For Steam

For Air

How to Order Manifold Bases

VVX31
VVX32
VVX33

1 **07** **1**

Manifold base

Suffix

| | |
|---|----------|
| - | — |
| Z | Oil free |

Number of manifolds

| | |
|----|-------------|
| 02 | 2 stations |
| • | • |
| • | • |
| • | • |
| 10 | 10 stations |

Port size (Individual port)

| | |
|---|-------|
| 1 | Rc1/8 |
| 2 | Rc1/4 |

* Common port sizes are all Rc1/4.
* Indicating numbers shown below are for common ports.

| Type | SUP port | EXH port |
|------|----------|----------|
| N.C. | 1 | 3 |
| N.O. | 3 | 1 |

Blanking plate part no.

For VX31: **VVX31-4A-F**

For VX32/33: **VVX32-4A-F**

• **Seal material: FKM**

How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example
VVX311-05-1 1 set “*” is the symbol for mounting.
* VX3111A-00-1GR1 .. 4 sets Add an “*” in front of the part numbers for solenoid valves, etc. to be mounted.
* VVX31-4A-F..... 1 set

Enter the product's part number in order, counting from the 1st station on the left in the manifold arrangement, when viewed from the individual ports in front. The common ports on the right side are plugged.

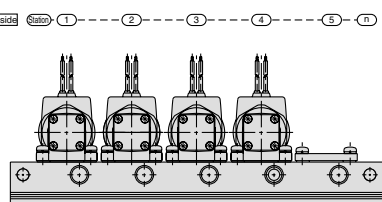


Table (1) Port/Orifice Size

| Solenoid valve | Orifice symbol (diameter) | | | |
|----------------|---------------------------|----------------|--------------|--------------|
| | 1 (1.5 mmø) | 2 (2.2 mmø) | 3 (3 mmø) | 4 (4 mmø) |
| VX31 | ● | ● | ● | — |
| VX32 | — | ● | ● | ● |
| VX33 | — | ● | ● | ● |

Table (2) Solenoid Valve Option

| Option symbol | Seal material | | Body material/ Shading coil material | Guide pin material | Coil insulation type |
|---------------|-------------------|-------------|---|--------------------|----------------------|
| | Main valve poppet | Fixed seals | | | |
| A | FKM | FKM | Brass (C37) | PPS | B |
| D | FKM | FKM | Brass (C37)/Copper | Stainless steel | H |

* Aluminum is the only available material for the manifold base.

The additives contained in oil are different depending on the type and manufacturers, so the durability of the seal materials will vary. For details, please consult with SMC.

Table (3) Rated Voltage – Electrical Entry – Electrical Option

| Rated voltage | | | Class B | | | Class H | | |
|---------------|----------------|---------|------------------------------------|-----------------|--|------------------------------------|-----------------|--|
| AC/DC | Voltage symbol | Voltage | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor |
| AC | 1 | 100 V | Note 1) | ● | Note 1) | ● | ● | ● |
| | 2 | 200 V | | ● | | ● | ● | |
| | 3 | 110 V | | ● | | ● | ● | |
| | 4 | 220 V | | ● | | ● | ● | |
| | 7 | 240 V | | — | | — | — | |
| | 8 | 48 V | | ● | | — | — | |
| DC | J | 230 V | — | — | — | — | — | — |
| | 5 | 24 V | ● | ● | ● | DC specification is not available. | | |
| | 6 | 12 V | ● | — | — | DC specification is not available. | | |

Note 1) Option S, Z are not available as a surge voltage suppressor is integrated into the AC/Class B coil as standard.

9


Series VX31/32/33

For Steam /Single Unit

Model/Valve Specifications

COM.

Passage symbol



| Port size | Orifice size (mmø) | Model | Max. operating pressure differential (MPa) | Flow characteristics | | Max. system pressure (MPa) | Weight ^{Note)} (g) |
|--------------|--------------------|-----------|--|--------------------------------------|--------------|----------------------------|-----------------------------|
| | | | COM. | Av x 10 ⁻⁶ m ² | Cv converted | | |
| 1/8 (6A) | 1.5 | VX3114-01 | 0.7 | 1.9 | 0.08 | 1.0 | 380 |
| | 2.2 | VX3124-01 | 0.4 | 3.8 | 0.16 | | |
| | 3 | VX3134-01 | 0.2 | 5.8 | 0.24 | | |
| 1/4 (8A) | 1.5 | VX3114-02 | 0.7 | 1.9 | 0.08 | | |
| | | VX3124-02 | 0.4 | 3.8 | 0.16 | | |
| | | VX3224-02 | 0.7 | 4.6 | 0.19 | | |
| | VX3324-02 | 1 | | | | | |
| | 3 | VX3134-02 | 0.2 | 5.8 | 0.24 | | |
| | | VX3234-02 | 0.3 | 7.9 | 0.33 | | |
| | | VX3334-02 | 0.6 | | | | |
| | 4 | VX3244-02 | 0.2 | 12 | 0.50 | | |
| VX3344-02 | | 0.3 | | | | | |
| 3/8 (10A) | 2.2 | VX3224-03 | 0.7 | 4.6 | 0.19 | | |
| | | VX3324-03 | 1 | | | | |
| | 3 | VX3234-03 | 0.3 | 7.9 | 0.33 | | |
| | | VX3334-03 | 0.6 | | | | |
| | 4 | VX3244-03 | 0.2 | 12 | 0.50 | | |
| | | VX3344-03 | 0.3 | | | | |



Note) Weight of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for terminal type respectively. Also, add 60 g for VX31□□, 80 g for VX32□□ and VX33□□ respectively for bracket option.

• Refer to "Glossary of Terms" on front matter 9, for details on the max. operating pressure differential and the max. system pressure.


Operating Fluid and Ambient Temperature

| Power source | Operating fluid temperature (°C) | Ambient temperature (°C) |
|--------------|----------------------------------|--------------------------|
| | Solenoid valve option (symbol) | |
| AC | S, Q | -20 to 60 |
| | 183 | |

Tightness of Valve (Leakage Rate)

| Seal material | | Leakage rate (With air pressure) |
|-------------------|-------------|----------------------------------|
| Main valve poppet | Fixed seals | |
| FFKM | PTFE | 150 cm ³ /min or less |

How to Order (Single Unit)

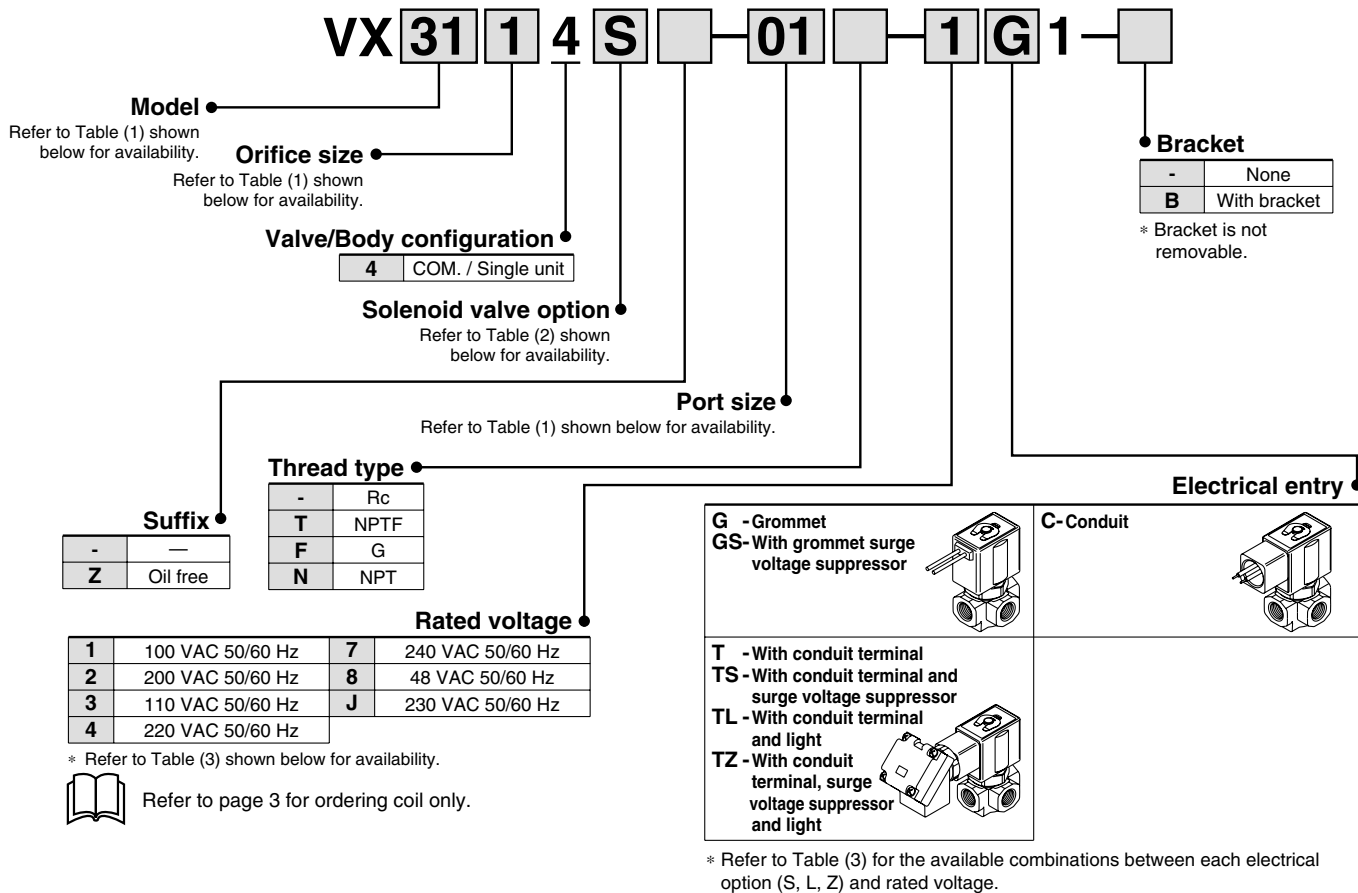

For Water

For Oil

For Steam

For Air

Table (1) Port/Orifice Size

| Solenoid valve | | Orifice symbol (diameter) | | | | | |
|-------------------------|----------|---------------------------|----------------|--------------|--------------|---|---|
| | | 1 (1.5 mmø) | 2 (2.2 mmø) | 3 (3 mmø) | 4 (4 mmø) | | |
| Model | VX31 | VX32 | VX33 | ● | ● | ● | — |
| Port no. (Port size) | 01 (1/8) | — | — | ● | ● | ● | — |
| | 02 (1/4) | — | — | ● | ● | ● | — |
| | — | 02 (1/4) | 02 (1/4) | — | ● | ● | ● |
| — | 03 (3/8) | 03 (3/8) | — | — | ● | ● | ● |

Table (2) Solenoid Valve Option

| Option symbol | Seal material | | Body material/ Shading coil material | Guide pin material | Coil insulation type |
|---------------|-------------------|---------------|---|--------------------|----------------------|
| | Main valve poppet | Fixed sealant | | | |
| S | FFKM | PTFE | Brass (C37)/Copper | Stainless steel | H |
| Q | FFKM | PTFE | Stainless steel/Silver | Stainless steel | H |

Solenoid coil: AC/Class H only

Table (3) Rated Voltage – Electrical Option


| Rated voltage | | | Class H | | |
|---------------|----------------|---------|------------------------------------|-----------------|--|
| AC/DC | Voltage symbol | Voltage | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor |
| AC | 1 | 100 V | ● | ● | ● |
| | 2 | 200 V | ● | ● | ● |
| | 3 | 110 V | ● | ● | ● |
| | 4 | 220 V | ● | ● | ● |
| | 7 | 240 V | ● | — | — |
| | 8 | 48 V | ● | — | — |
| DC | J | 230 V | ● | — | — |
| | 5 | 24 V | DC specification is not available. | | |
| | 6 | 12 V | DC specification is not available. | | |

Series VX31/32/33

For Air /Single Unit

(Inert gas, Non-leak, Medium vacuum)

Model/Valve Specifications

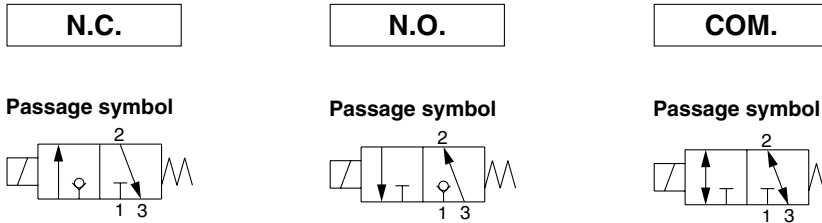

| Port size | Orifice size (mmø) | Model | Max. operating pressure differential (MPa) | | | Flow characteristics | | | Max. system pressure (MPa) | Weight (g) ^{Note)} |
|-----------|--------------------|-----------|--|------|------|-----------------------------|------|------|----------------------------|-----------------------------|
| | | | N.C. | N.O. | COM. | C[dm ³ /(s·bar)] | b | Cv | | |
| 1/8 (6A) | 1.5 | VX311□-01 | 1 | 1 | 0.7 | 0.29 | 0.32 | 0.08 | 2.0 | 380 |
| | 2.2 | VX312□-01 | 0.7 | 0.5 | 0.4 | 0.60 | 0.25 | 0.15 | | |
| | 3 | VX313□-01 | 0.3 | 0.3 | 0.2 | 0.82 | 0.20 | 0.20 | | |
| 1/4 (8A) | 1.5 | VX311□-02 | 1 | 1 | 0.7 | 0.29 | 0.32 | 0.08 | | |
| | | VX312□-02 | 0.7 | 0.5 | 0.4 | 0.60 | 0.25 | 0.15 | | |
| | 2.2 | VX322□-02 | 1.2 | 1 | 0.7 | 0.64 | 0.40 | 0.17 | | |
| | | VX332□-02 | 1.6 | 1.6 | 1 | | | | | |
| | | VX313□-02 | 0.3 | 0.3 | 0.2 | 0.82 | 0.20 | 0.20 | | |
| | 3 | VX323□-02 | 0.6 | 0.5 | 0.3 | 1.1 | 0.25 | 0.27 | | |
| | | VX333□-02 | 1 | 0.9 | 0.6 | | | | | |
| | | VX324□-02 | 0.3 | 0.25 | 0.2 | | | | | |
| 4 | VX334□-02 | 0.5 | 0.4 | 0.3 | 1.6 | 0.20 | 0.38 | | | |
| | VX324□-02 | 0.3 | 0.25 | 0.2 | | | | | | |
| 3/8 (10A) | 2.2 | VX322□-03 | 1.2 | 1 | 0.7 | 0.64 | 0.40 | 0.17 | | |
| | | VX332□-03 | 1.6 | 1.6 | 1 | | | | | |
| | 3 | VX323□-03 | 0.6 | 0.5 | 0.3 | 1.1 | 0.25 | 0.27 | | |
| | | VX333□-03 | 1 | 0.9 | 0.6 | | | | | |
| | 4 | VX324□-03 | 0.3 | 0.25 | 0.2 | 1.6 | 0.20 | 0.38 | | |
| | | VX334□-03 | 0.5 | 0.4 | 0.3 | | | | | |

Note) Weight of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for terminal type respectively.

Also, add 60 g for VX31□□, 80 g for VX32□□ and VX33□□ respectively for bracket option.

• Refer to "Glossary of Terms" on front matter 9, for details on the max. operating pressure differential and the max. system pressure.

Operating Fluid and Ambient Temperature

| Power source | Operating fluid temperature (°C) | | Ambient temperature (°C) |
|------------------|----------------------------------|----------------------------|--------------------------|
| | Solenoid valve option (symbol) | | |
| | Standard, G | V, M | |
| AC (Class B), DC | -10 ^{Note)} to 60 | -10 ^{Note)} to 60 | -20 to 60 |

Note) Dew point temperature: -10°C or less

Tightness of Valve (Leakage Rate)

| Seal material | Max. operating pressure differential | Leakage rate | |
|---------------|--------------------------------------|--------------------------------|---|
| | | Air | ^{Note)} Non-leak, Medium vacuum |
| NBR, FKM | From 0 to less than 1 MPa | 1 cm ³ /min or less | 10 ⁻⁶ Pa·m ³ /sec or less |
| | 1 MPa or more | 2 cm ³ /min or less | |

Note) The leakage amount (10⁻⁶ Pa·m³/sec) for the "V" and "M" option are values when the differential pressure is 0.1 MPa.

How to Order (Single Unit)

DC

AC/Class B coil (with full-wave rectifier)

VX 31 1 4 [] [] - 01 [] - 5 G 1 - []

VX 31 1 4 [] [] - 01 [] - 1 GR1 - []

Bracket

| | |
|---|--------------|
| - | None |
| B | With bracket |

* Bracket is not removable.

Model • Refer to Table (1) shown below for availability.

Orifice size • Refer to Table (1) shown below for availability.

Valve/Body configuration •

| | |
|---|--------------------|
| 0 | N.C. / Single unit |
| 2 | N.O. / Single unit |
| 4 | COM. / Single unit |

Solenoid valve option • Refer to Table (2) shown below for availability.

Port size • Refer to Table (1) shown below for availability.

Suffix •

| | |
|---|----------|
| - | — |
| Z | Oil free |

Thread type •

| | |
|---|------|
| - | Rc |
| T | NPTF |
| F | G |
| N | NPT |

Rated voltage •

| | | | |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC | | |

* Refer to Table (3) shown below for availability.

Refer to page 3 for ordering coil only.

Electrical entry (AC/DC)

| | | | |
|---|--|---|--|
| G - Grommet | | C - Conduit | |
| GS - With grommet surge voltage suppressor | | | |
| T - With conduit terminal | | D - DIN | |
| TS - With conduit terminal and surge voltage suppressor | | DS - DIN with surge voltage suppressor | |
| TL - With conduit terminal and light | | DL - DIN with light | |
| TZ - With conduit terminal, surge voltage suppressor and light | | DZ - DIN with surge voltage suppressor and light | |
| | | DO - For DIN (without connector) | |

* DIN type is available with class B insulation only.

* Refer to Table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.

* Surge voltage suppressor is integrated into the AC/Class B coil as standard.

For Water

For Oil

For Steam

For Air

Table (1) Port/Orifice Size

| Solenoid valve | | | Orifice symbol (diameter) | | | | |
|-------------------------|----------|----------|---------------------------|----------------|----------------|--------------|--------------|
| Model | VX31 | VX32 | VX33 | 1 (1.5 mmø) | 2 (2.2 mmø) | 3 (3 mmø) | 4 (4 mmø) |
| Port no. (Port size) | 01 (1/8) | — | — | ● | ● | ● | — |
| | 02 (1/4) | — | — | ● | ● | ● | — |
| | — | 02 (1/4) | 02 (1/4) | — | ● | ● | ● |
| | — | 03 (3/8) | 03 (3/8) | — | ● | ● | ● |

Table (2) Solenoid Valve Option

| Option symbol | Seal material | | Body material/ Shading coil material | Guide pin material | Coil insulation type | Note ^{Note)} |
|---------------|-------------------|-------------|---|--------------------|----------------------|---|
| | Main valve poppet | Fixed seals | | | | |
| - | | | Brass (C37) | | | — |
| G | NBR | NBR | Stainless steel | PPS | B | Non-leak (10 ⁻⁶ Pa·m ³ /sec), Medium vacuum (0.1 Pa.abs) |
| M | FKM | FKM | Stainless steel | | | |
| V | FKM | FKM | Brass (C37) | | | |

Note) The leakage amount (10⁻⁶ Pa·m³/sec) for the "V" and "M" option are values when the differential pressure is 0.1 MPa.

Table (3) Rated Voltage – Electrical Option

| Rated voltage | | Class B | | | |
|---------------|----------------|---------|------------------------------------|-----------------|--|
| AC/DC | Voltage symbol | Voltage | S With surge voltage suppressor | L With light | Z With light and surge voltage suppressor |
| AC | 1 | 100 V | | ● | |
| | 2 | 200 V | | ● | |
| | 3 | 110 V | | ● | |
| | 4 | 220 V | Note 1) | ● | Note 1) |
| | 7 | 240 V | | — | |
| | 8 | 48 V | | — | |
| DC | J | 230 V | | — | |
| | 5 | 24 V | ● | ● | ● |
| | 6 | 12 V | ● | — | — |

Note 1) Option S, Z are not available as a surge voltage suppressor is integrated into the AC/Class B coil as standard.


* Class H coil is not available.

Series VVX31/32/33

For Air/Manifold

(Inert gas, Non-leak, Medium vacuum)

Solenoid Valve for Manifold/Valve Specifications

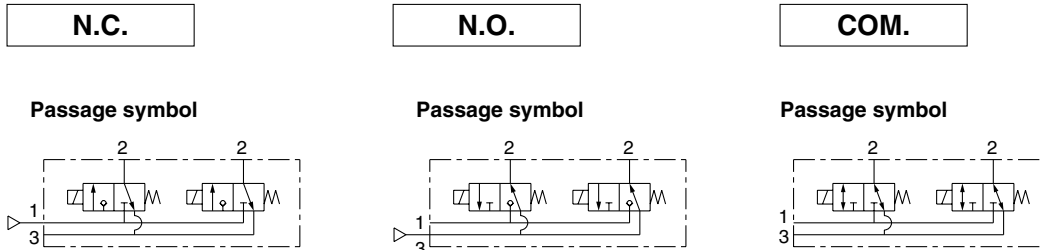

| Orifice size (mmø) | Model | Max. operating pressure differential (MPa) | | | Flow characteristics | | | Max. system pressure (MPa) |
|--------------------|-----------|--|------|------|-----------------------------|------|------|----------------------------|
| | | N.C. | N.O. | COM. | C[dm ³ /(s·bar)] | b | Cv | |
| 1.5 | VX311□-00 | 1 | 1 | 0.7 | 0.29 | 0.32 | 0.08 | 2.0 |
| 2.2 | VX312□-00 | 0.7 | 0.5 | 0.4 | 0.60 | 0.25 | 0.15 | |
| | VX322□-00 | 1.2 | 1 | 0.7 | 0.64 | 0.40 | 0.20 | |
| VX332□-00 | 1.6 | 1.6 | 1 | | | | | |
| 3 | VX313□-00 | 0.3 | 0.3 | 0.2 | 0.82 | 0.20 | 0.17 | |
| | VX323□-00 | 0.6 | 0.5 | 0.3 | 1.1 | 0.25 | 0.27 | |
| VX333□-00 | 1 | 0.9 | 0.6 | | | | | |
| 4 | VX324□-00 | 0.3 | 0.25 | 0.2 | 1.6 | 0.20 | 0.38 | |
| | VX334□-00 | 0.5 | 0.4 | 0.3 | | | | |



• Refer to "Glossary of Terms" on front matter 9 for details on the max. operating pressure differential and the max. system pressure.

Operating Fluid and Ambient Temperature

| Power source | Operating fluid temperature (°C) | | Ambient temperature (°C) |
|------------------|----------------------------------|----------------------------|--------------------------|
| | Solenoid valve option (symbol) | | |
| AC (Class B), DC | Standard | -10 ^{Note)} to 60 | -20 to 60 |
| | V | -10 ^{Note)} to 60 | |



Note) Dew point temperature: -10°C or less

Tightness of Valve (Leakage Rate)

| Seal material | Max. operating pressure differential | Leakage rate | |
|---------------|--------------------------------------|--------------------------------|---|
| | | Air | ^{Note)} Non-leak, Medium vacuum |
| NBR, FKM | From 0 to less than 1 MPa | 1 cm ³ /min or less | 10 ⁻⁶ Pa·m ³ /sec or less |
| | 1 MPa or more | 2 cm ³ /min or less | |



Note) The leakage amount (10⁻⁶ Pa·m³/sec) for the "V" option is a value when the differential pressure is 0.1 MPa.

How to Order (Solenoid Valve for Manifold)

DC
AC/Class B coil (with full-wave rectifier)

Model Refer to Table (1) shown below for availability.

Orifice size Refer to Table (1) shown below for availability.

Suffix

| | |
|---|----------|
| - | — |
| Z | Oil free |

Valve/Body configuration

| | |
|---|-----------------|
| 1 | N.C. / Manifold |
| 3 | N.O. / Manifold |
| 5 | COM. / Manifold |

Solenoid valve option Refer to Table (2) shown below for availability.

Rated voltage

| | | | |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC | | |

* Refer to Table (3) shown below for availability.

Refer to page 3 for ordering coil only.

Electrical entry (AC/DC)

G - Grommet
GS - With grommet surge voltage suppressor

C - Conduit

T - With conduit terminal
TS - With conduit terminal and surge voltage suppressor
TL - With conduit terminal and light
TZ - With conduit terminal, surge voltage suppressor and light

D - DIN
DS - DIN with surge voltage suppressor
DL - DIN with light
DZ - DIN with surge voltage suppressor and light
DO - For DIN (without connector)

* DIN type is available with class B insulation only.

For Water

For Oil

For Steam

For Air

How to Order Manifold Bases

VVX31
VVX32
VVX33

Number of manifolds

| | |
|----|-------------|
| 02 | 2 stations |
| • | • |
| • | • |
| • | • |
| 10 | 10 stations |

Port size (Individual port)

| | |
|---|-------|
| 1 | Rc1/8 |
| 2 | Rc1/4 |

* Common port sizes are all Rc1/4.
 * Indicating numbers shown below are for common

| Type | SUP port | EXH port |
|------|----------|----------|
| N.C. | 1 | 3 |
| N.O. | 3 | 1 |

Suffix

| | |
|---|----------|
| - | — |
| Z | Oil free |

Manifold base

Blanking plate part no.

For VX31: VVX31-4A-
 For VX32/33: VVX32-4A-

Seal material

| | |
|---|-----|
| - | NBR |
| F | FKM |

How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example
 VVX311-05-1 1 set "*" is the symbol for mounting.
 * VX3111-00-1GR1 ... 4 sets Add an "*" in front of the part numbers for solenoid valves, etc. to be mounted.
 * VVX31-4A 1 set

Enter the product's part number in order, counting from the 1st station on the left in the manifold arrangement, when viewed with the individual ports in front. The common ports on the right side are plugged.

Table (1) Port/Orifice Size

| Solenoid valve | Orifice symbol (diameter) | | | |
|----------------|---------------------------|----------------|--------------|--------------|
| | 1 (1.5 mmø) | 2 (2.2 mmø) | 3 (3 mmø) | 4 (4 mmø) |
| VX31 | ● | ● | ● | — |
| VX32 | — | ● | ● | ● |
| VX33 | — | ● | ● | ● |

Table (2) Solenoid Valve Option

| Option symbol | Seal material | | Body material | Guide pin material | Coil insulation type | Note ^{Note)} |
|---------------|-------------------|-------------|---------------|--------------------|----------------------|--|
| | Main valve poppet | Fixed seals | | | | |
| - | NBR | NBR | Brass (C37) | PPS | B | Non-leak (10 ⁻⁶ Pa·m ³ /sec), Medium vacuum (0.1 Pa.abs) |
| V | FKM | FKM | | | | |

* Aluminum is the only available material for the manifold base.

Note) The leakage amount (10⁻⁶ Pa·m³/sec) for the "V" and "M" option are values when the differential pressure is 0.1 MPa.

Table (3) Rated Voltage – Electrical Option

| Rated voltage | Class B | | |
|---------------|---------|---|---------|
| | S | L | Z |
| AC | 1 100 V | ● | Note 1) |
| | 2 200 V | ● | |
| | 3 110 V | ● | |
| | 4 220 V | ● | |
| | 7 240 V | — | |
| | 8 48 V | — | |
| DC | J 230 V | — | Note 1) |
| | 5 24 V | ● | |
| | 6 12 V | ● | |

* Class H coil is not available.

Note 1) Option S, Z are not available as a surge voltage suppressor is integrated into the AC/Class B coil as standard.


Series VX31/32/33

For Water, Oil, Steam, Air

Construction

Single unit

Body material: Brass, Stainless Steel

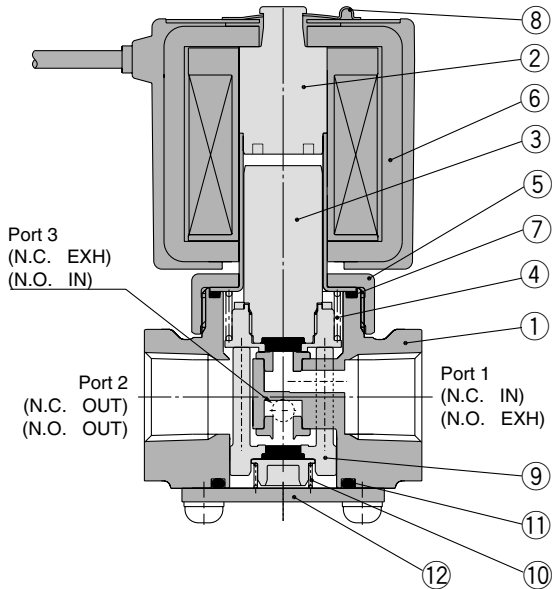

Component Parts


| No. | Description | Material | |
|-----|---------------------------|------------------------------------|---|
| | | Standard | Option |
| 1 | Body | Brass | Stainless steel |
| 2 | Tube assembly | Stainless steel, Copper | Stainless steel, Silver |
| 3 | Armature assembly | Stainless steel, Brass, PTFE (NBR) | Stainless steel, PTFE (FKM, EPDM, FFKM) |
| 4 | Return spring | Stainless steel | |
| 5 | Nut | Brass | Brass • Ni plated |
| 6 | Solenoid coil | Class B molded | Class H molded |
| 7 | O-ring | (NBR) | (FKM, EPDM, PTFE) |
| 8 | Clip | SK | |
| 9 | Guide pin assembly | PPS, Brass, (NBR) | Stainless steel (FKM, EPDM, FFKM) |
| 10 | Support spring | Stainless steel | |
| 11 | O-ring | (NBR) | (FKM, EPDM, PTFE) |
| 12 | Plate | Stainless steel | |

The materials in parentheses are the seal materials.

Manifold

Base material: Aluminum

Manifold body material: Brass

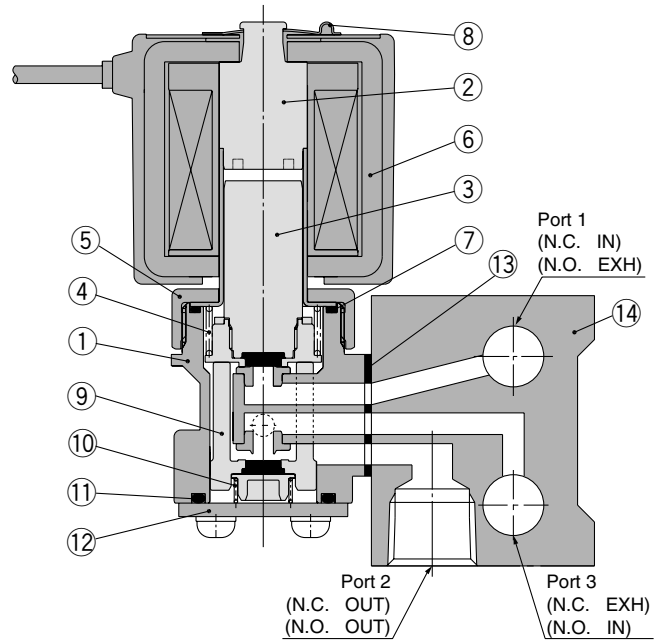

Component Parts

| No. | Description | Material | |
|-----|---------------------------|------------------------------------|---|
| | | Standard | Option |
| 1 | Manifold body | Brass | |
| 2 | Tube assembly | Stainless steel, Copper | |
| 3 | Armature assembly | Stainless steel, Brass, PTFE (NBR) | Stainless steel, PTFE (FKM, EPDM, FFKM) |
| 4 | Return spring | Stainless steel | |
| 5 | Nut | Brass | Brass • Ni plated |
| 6 | Solenoid coil | Class B molded | Class H molded |
| 7 | O-ring | (NBR) | (FKM, EPDM) |
| 8 | Clip | SK | |
| 9 | Guide pin assembly | PPS, Brass, (NBR) | Stainless steel (FKM, EPDM) |
| 10 | Support spring | Stainless steel | |
| 11 | O-ring | (NBR) | (FKM, EPDM) |
| 12 | Plate | Stainless steel | |
| 13 | Gasket | (NBR) | (FKM, EPDM) |
| 14 | Base | Aluminum | |

The materials in parentheses are the seal materials.


Dimensions: Single Unit/Body Material: Brass (C37), Stainless Steel

Normally closed (N.C.): VX31□0/VX32□0/VX33□0


Normally open (N.O.): VX31□2/VX32□2/VX33□2

Common (COM.): VX31□4/VX32□4/VX33□4


Grommet: G

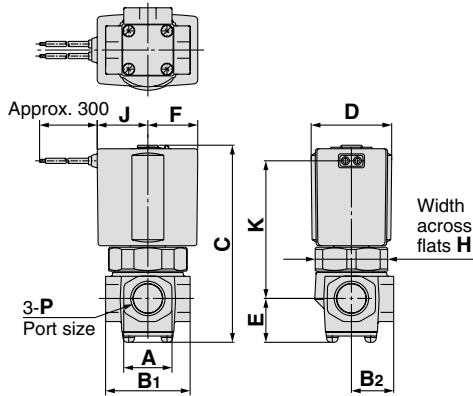


Conduit: C

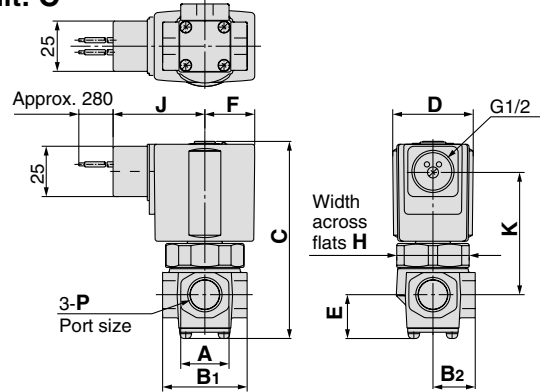


DIN terminal: D

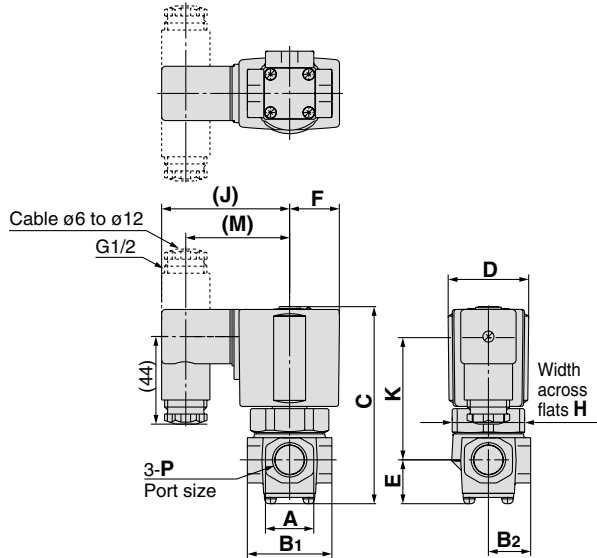

Conduit terminal: T

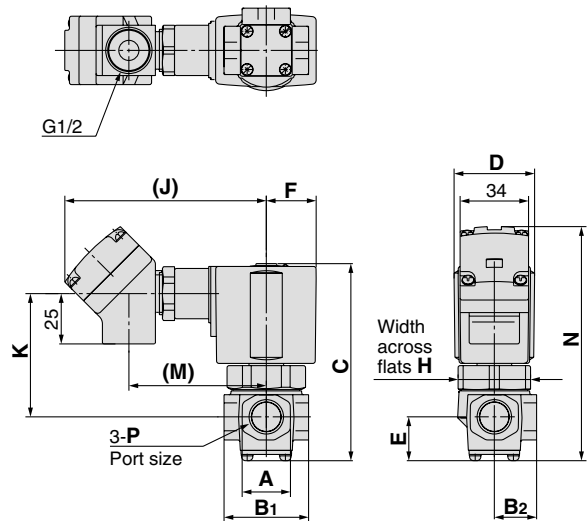

Specifications with bracket

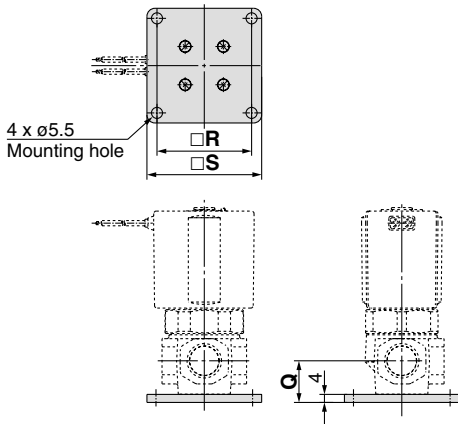

| Model | Orifice size | Port size P | Electrical entry (AC/Class B) | | | | | | | | | | | | | | | |
|-------------------------|--------------|-------------|-------------------------------|------|---------|------|--------------|------|------------------|-------|------|------|------|--|--|--|--|--|
| | | | Grommet | | Conduit | | DIN terminal | | Conduit terminal | | | | | | | | | |
| | | | J | K | J | K | J | K | M | J | K | M | N | | | | | |
| N.C., N.O., COM. | | | | | | | | | | | | | | | | | | |
| VX31□□ | ø1.5,ø2.2,ø3 | 1/8 | 30 | 46 | 48.5 | 41 | 65.5 | 42 | 53.5 | 100.5 | 41 | 69.5 | 91.5 | | | | | |
| VX31□□ | ø1.5,ø2.2,ø3 | 1/4 | | | | | | | | | | | | | | | | |
| VX32□□ | ø2.2,ø3,ø4 | 1/4,3/8 | 33 | 56 | 51.5 | 51 | 68.5 | 52 | 56.5 | 103.5 | 51 | 72.5 | 105 | | | | | |
| VX33□□ | ø2.2,ø3,ø4 | 1/4,3/8 | 36 | 64.5 | 54 | 59.5 | 71 | 60.5 | 59 | 106 | 59.5 | 75 | 113 | | | | | |

| Model | Orifice size | Port size P | A | B | | C | D | E | F | H | Electrical entry (DC, AC/Class H) | | | | | | | | Bracket mounting | | | | | | | |
|-------------------------|--------------|-------------|----|----------------|----------------|------|----|----|------|----|-----------------------------------|------|---------|------|--------------|------|------------------|----|------------------|------|-------|------|----|----|--|--|
| | | | | B ₁ | B ₂ | | | | | | Grommet | | Conduit | | DIN terminal | | Conduit terminal | | Q | R | S | | | | | |
| | | | | | | | | | | | J | K | J | K | J | K | M | J | | | | K | M | N | | |
| N.C., N.O., COM. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VX31□□ | ø1.5,ø2.2,ø3 | 1/8 | 22 | 36 | 18 | 76.5 | 30 | 19 | 19.5 | 27 | 19.5 | 50 | 40 | 42.5 | 58.5 | 42 | 46.5 | 92 | 42.5 | 61 | 93 | 17.5 | 40 | 50 | | |
| VX31□□ | ø1.5,ø2.2,ø3 | 1/4 | | 41 | 20.5 | | | | | | | | | | | | | | | | | | | | | |
| VX32□□ | ø2.2,ø3,ø4 | 1/4,3/8 | 24 | 42 | 21 | 90 | 35 | 22 | 22.5 | 32 | 22.5 | 60 | 43 | 52.5 | 61.5 | 52 | 49.5 | 95 | 52.5 | 64 | 106.5 | 21 | 47 | 57 | | |
| VX33□□ | ø2.2,ø3,ø4 | 1/4,3/8 | 24 | 42 | 21 | 98 | 40 | 22 | 25 | 36 | 25.5 | 68.5 | 46 | 61 | 64 | 60.5 | 52 | 98 | 61 | 66.5 | 114.5 | 21 | 47 | 57 | | |

Series VVX31/32/33




For Oil, Air/Manifold

Dimensions: Manifold/Base Material: Aluminum

Normally closed (N.C.):

Normally open (N.O.): VVX31/VVX32/VVX33

Common (COM.):

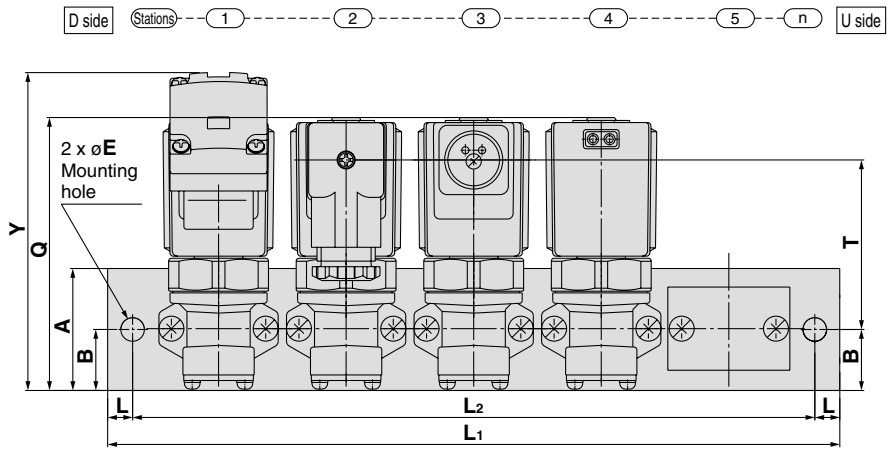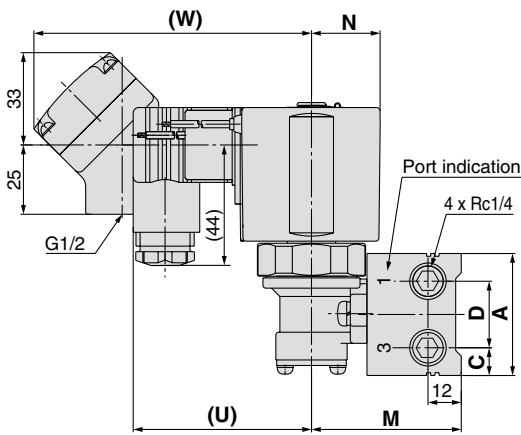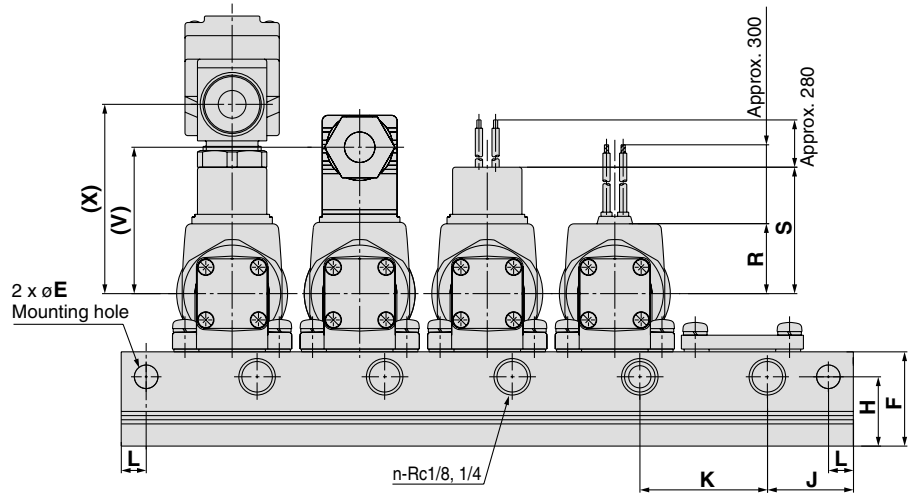

(mm)

| Model | Dimension | n (stations) | | | | | | | | |
|-------|-----------|--------------|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| VVX31 | L1 | 96 | 132 | 168 | 204 | 240 | 276 | 312 | 348 | 384 |
| | L2 | 84 | 120 | 156 | 192 | 228 | 264 | 300 | 336 | 372 |
| VVX32 | L1 | 126 | 172 | 218 | 264 | 310 | 356 | 402 | 448 | 494 |
| | L2 | 108 | 154 | 200 | 246 | 292 | 338 | 384 | 430 | 476 |

(mm)

| Model | A | B | C | D | E | F | H | J | K | L | M | N | Q | Electrical entry (DC, AC/Class H) | | | | | | | | |
|-------|----|----|----|----|-----|----|----|----|----|---|----|------|------|-----------------------------------|----|---------|------|--------------|------|----|------------------|-------|
| | | | | | | | | | | | | | | Grommet | | Conduit | | DIN terminal | | | Conduit terminal | |
| | | | | | | | | | | | | | | R | S | T | T | U | V | W | X | Y |
| VVX31 | 40 | 20 | 9 | 22 | 6.5 | 33 | 24 | 26 | 36 | 6 | 49 | 19.5 | 80.5 | 19.5 | 40 | 45.5 | 45 | 58.5 | 46.5 | 92 | 61 | 97 |
| VVX32 | 44 | 22 | 10 | 24 | 8.5 | 34 | 25 | 31 | 46 | 9 | 55 | 22.5 | 91 | 22.5 | 43 | 54 | 53.5 | 61.5 | 49.5 | 95 | 64 | 107.5 |
| VVX33 | 44 | 22 | 10 | 24 | 8.5 | 34 | 25 | 31 | 46 | 9 | 55 | 25 | 99.5 | 25.5 | 46 | 62 | 61.5 | 64 | 52 | 98 | 66.5 | 116 |

(mm)

| Model | Electrical entry (AC/Class B) | | | | | | | | |
|-------|-------------------------------|------|---------|------|--------------|------|-------|------------------|-------|
| | Grommet | | Conduit | | DIN terminal | | | Conduit terminal | |
| | R | S | T | T | U | V | W | X | Y |
| VVX31 | 30 | 48.5 | 44 | 45 | 65.5 | 53.5 | 100.5 | 69.5 | 95.5 |
| VVX32 | 33 | 51.5 | 52.5 | 53.5 | 68.5 | 56.5 | 103.5 | 72.5 | 106 |
| VVX33 | 36 | 54 | 60.5 | 61.5 | 71 | 59 | 106 | 75 | 114.5 |

For Vacuum Pad Series VXV31/32/33


- Vacuum circuit side is suited for a large orifice. Supply pressure side is suited for high pressure and a vacuum pad.
- Construction and dimensions are the same as the VX3 series.

Model/Valve Specifications


N.C.

N.O.

Passage symbol (example)



Passage symbol (example)



| Port size | Orifice size (mmø) | | Model | Operating pressure (MPa) | | Flow characteristics | | | | | | Max. system pressure (MPa) | Note) Weight (g) | | | | |
|--------------|--------------------|-------------|------------|--------------------------|---------------|-----------------------------|------|------|-----------------------------|------|------|----------------------------|---------------------|-----|-----|-----|-----|
| | Port 1 side | Port 3 side | | Port 1 side | Port 3 side | Passage: 1↔2 | | | Passage: 2↔3 | | | | | | | | |
| | | | | | | C[dm ³ /(s·bar)] | b | Cv | C[dm ³ /(s·bar)] | b | Cv | | | | | | |
| 1/8 (6A) | 3 | 1.5 | VXV3130-01 | Medium vacuum | 0 to 0.5 | 0.82 | 0.20 | 0.20 | 0.29 | 0.32 | 0.08 | 2.0 | 380 | | | | |
| | 1.5 | 3 | VXV3132-01 | 0 to 0.5 | Medium vacuum | 0.29 | 0.32 | 0.08 | 0.82 | 0.20 | 0.20 | | | | | | |
| 1/4 (8A) | 3 | 1.5 | VXV3130-02 | Medium vacuum | 0 to 0.5 | 0.82 | 0.20 | 0.20 | 0.29 | 0.32 | 0.08 | | | 530 | | | |
| | 1.5 | 3 | VXV3132-02 | 0 to 0.5 | Medium vacuum | 0.29 | 0.32 | 0.08 | 0.82 | 0.20 | 0.20 | | | | 730 | | |
| | 4 | 2.2 | VXV3240-02 | Medium vacuum | 0 to 0.5 | 1.6 | 0.20 | 0.38 | 0.64 | 0.40 | 0.17 | | | | | 530 | |
| | | | VXV3340-02 | Medium vacuum | 0 to 0.9 | | | | | | | | | | | | |
| | 2.2 | 4 | VXV3242-02 | 0 to 0.5 | Medium vacuum | 0.64 | 0.40 | 0.17 | 1.6 | 0.20 | 0.38 | | | | | | 730 |
| | | | VXV3342-02 | 0 to 0.9 | Medium vacuum | | | | | | | | | | | | |
| 3/8 (10A) | 4 | 2.2 | VXV3240-03 | Medium vacuum | 0 to 0.5 | 1.6 | 0.20 | 0.38 | 0.64 | 0.40 | 0.17 | | | 530 | | | |
| | | | VXV3340-03 | Medium vacuum | 0 to 0.9 | | | | | | | | | | | | |
| | 2.2 | 4 | VXV3242-03 | 0 to 0.5 | Medium vacuum | 0.64 | 0.40 | 0.17 | 1.6 | 0.20 | 0.38 | | | | 730 | | |
| | | | VXV3342-03 | 0 to 0.9 | Medium vacuum | | | | | | | | | | | | |



Note) Weight of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for terminal type respectively.

Also, add 60 g for VX31□□, 80 g for VX32□□ and VX33□□ respectively for bracket option.

• Refer to "Glossary of Terms" on front matter 9, for details on the max. operating pressure differential and the max. system pressure.

Operating Fluid and Ambient Temperature

| Power source | Operating fluid temperature (°C) | Ambient temperature (°C) |
|------------------|----------------------------------|--------------------------|
| AC (Class B), DC | -10 ^{Note 1)} to 60 | -20 to 60 |



Note 1) Dew point temperature: -10°C or less

Tightness of Valve (Leakage Rate)

| Seal material | Leakage rate ^{Note)} |
|---------------|--------------------------------|
| | Air |
| NBR, FKM | 1 cm ³ /min or less |



Note) Value when air pressure is applied.

Series VXV31/32/33

For Vacuum Pad/Single Unit

How to Order (Single Unit)

DC
AC/Class B coil (with full-wave rectifier)

Model • Refer to Table (1) shown below for availability.

Orifice size • Refer to Table (1) shown below for availability.

Valve/Body configuration

| | |
|---|--------------------|
| 0 | N.C. / Single unit |
| 2 | N.O. / Single unit |

Solenoid valve option • Refer to Table (2) shown below for availability.

Port size • Refer to Table (1) shown below for availability.

Thread type

| | |
|---|------|
| - | Rc |
| T | NPTF |
| F | G |
| N | NPT |

Suffix

| | |
|---|----------|
| - | — |
| Z | Oil free |

Rated voltage

| | | | |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC | | |

* Refer to Table (3) shown below for availability.

Refer to page 3 for ordering coil only.

Bracket

| | |
|---|--------------|
| - | None |
| B | With bracket |

* Bracket is not removable.

With full-wave rectifier, surge voltage suppressor

Electrical entry (AC/DC)

| | | | |
|--|--|---|--|
| G - Grommet GS - With grommet surge voltage suppressor | | C - Conduit | |
| T - With conduit terminal TS - With conduit terminal and surge voltage suppressor TL - With conduit terminal and light TZ - With conduit terminal, surge voltage suppressor and light | | D - DIN DS - DIN with surge voltage suppressor DL - DIN with light DZ - DIN with surge voltage suppressor and light DO - For DIN (without connector) | |

* Refer to Table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.
 * Surge voltage suppressor is integrated into the AC/Class B coil as standard.

Table (1) Port/Orifice Size

| Model | Solenoid valve | | | Orifice symbol (diameter) ^{Note)} | |
|-------------------------|----------------|----------|----------|--|------------------|
| | VXV31 | VXV32 | VXV33 | 3 (1.5/3 mmø) | 4 (2.2/4 mmø) |
| Port no. (Port size) | 01 (1/8) | — | — | ● | — |
| | 02 (1/4) | — | — | ● | — |
| | — | 02 (1/4) | 02 (1/4) | — | ● |
| | — | 03 (3/8) | 03 (3/8) | — | ● |

Note) The orifice diameter shown above are for the supply pressure side/ vacuum side port.

Table (2) Solenoid Valve Option

| Option symbol | Seal material | | Body material | Guide pin material | Coil insulation type |
|---------------|-------------------|-------------|-----------------|--------------------|----------------------|
| | Main valve poppet | Fixed seals | | | |
| - | NBR | NBR | Brass (C37) | PPS | B |
| A | FKM | FKM | | | |
| G | NBR | NBR | Stainless steel | | |
| H | FKM | FKM | | | |

Table (3) Rated Voltage – Electrical Option

| Rated voltage | Class B | | | | | |
|---------------|----------------|---------|----------------|---------|-------------------------------|------------|
| | Voltage symbol | Voltage | S | L | Z | |
| AC | | | Voltage symbol | Voltage | With surge voltage suppressor | With light |
| | 1 | 100 V | | | ● | — |
| | 2 | 200 V | | | ● | — |
| | 3 | 110 V | | | ● | — |
| | 4 | 220 V | | | Note 1) | Note 1) |
| | 7 | 240 V | | | — | — |
| 8 | 48 V | — | — | | | |
| J | 230 V | — | — | | | |
| DC | 5 | 24 V | ● | ● | ● | |
| | 6 | 12 V | ● | — | — | |

Note 1) Option S, Z are not available as a surge voltage suppressor is integrated into the AC/Class B coil as standard.

* Class H coil is not available.

For Vacuum Pad/Manifold Series **VVXV31/32/33**


- Construction and dimensions are the same as those of the VVX3 series.

Model/Valve Specifications


N.C.

N.O.

Passage symbol (example)

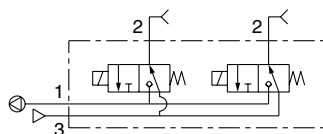

Passage symbol (example)

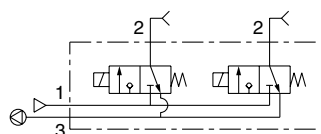

| Orifice size (mmø) | | Model | Operating pressure (MPa) | | Flow characteristics | | | | | | Max. system pressure (MPa) |
|--------------------|-------------|-------------------|--------------------------|---------------|-----------------------------|------|------|-----------------------------|------|------|----------------------------|
| Port 1 side | Port 3 side | | Port 1 side | Port 3 side | Passage: 1↔2 | | | Passage: 2↔3 | | | |
| | | | | | C[dm ³ /(s·bar)] | b | Cv | C[dm ³ /(s·bar)] | b | Cv | |
| 3 | 1.5 | VXV3131-00 | Medium vacuum | 0 to 0.5 | 0.82 | 0.20 | 0.20 | 0.29 | 0.32 | 0.08 | 2.0 |
| 1.5 | 3 | VXV3133-00 | 0 to 0.5 | Medium vacuum | 0.29 | 0.32 | 0.08 | 0.82 | 0.20 | 0.20 | |
| 4 | 2.2 | VXV3241-00 | Medium vacuum | 0 to 0.5 | 1.6 | 0.20 | 0.38 | 0.64 | 0.40 | 0.17 | |
| | | VXV3341-00 | | 0 to 0.9 | | | | | | | |
| 2.2 | 4 | VXV3243-00 | 0 to 0.5 | Medium vacuum | 0.64 | 0.40 | 0.17 | 1.6 | 0.20 | 0.38 | |
| | | VXV3343-00 | 0 to 0.9 | | | | | | | | |



• Refer to "Glossary of Terms" on front matter 9 for details on the max. operating pressure differential and the max. system pressure.

Operating Fluid and Ambient Temperature

| Power source | Operating fluid temperature (°C) | Ambient temperature (°C) |
|------------------|----------------------------------|--------------------------|
| AC (Class B), DC | -10 ^{Note 1)} to 60 | -20 to 60 |



Note 1) Dew point temperature: -10°C or less

Tightness of Valve (Leakage Rate)

| Seal material | Leakage rate ^{Note)} |
|---------------|--------------------------------|
| | Air |
| NBR, FKM | 1 cm ³ /min or less |



Note) Value when air pressure is applied.

Series VVXV31/32/33

For Vacuum Pad/Manifold

How to Order (Solenoid Valve for Manifold)

DC
AC/Class B coil (with full-wave rectifier)

Model Refer to Table (1) shown below for availability.
Valve/Body configuration

| | |
|---|-----------------|
| 1 | N.C. / Manifold |
| 3 | N.O. / Manifold |

Orifice size Refer to Table (1) shown below for availability.
Solenoid valve option Refer to Table (2) shown below for availability.

Rated voltage

| | | | |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC | | |

* Refer to Table (3) shown below for availability.
 Refer to page 3 for ordering coil only.

Suffix

| | |
|---|----------|
| - | — |
| Z | Oil free |

Electrical entry (AC/DC)

G - Grommet
GS - With grommet surge voltage suppressor
T - With conduit terminal
TS - With conduit terminal and surge voltage suppressor
TL - With conduit terminal and light
TZ - With conduit terminal, surge voltage suppressor and light

C - Conduit
D - DIN
DS - DIN with surge voltage suppressor
DL - DIN with light
DZ - DIN with surge voltage suppressor and light
DO - For DIN (without connector)

* DIN type is available with class B insulation only.

How to Order Manifold Bases

VVX31
VVX32 1-07-1
VVX33

Number of manifolds

| | |
|----|-------------|
| 02 | 2 stations |
| . | . |
| . | . |
| 10 | 10 stations |

Port size (Individual port)

| | |
|---|-------|
| 1 | Rc1/8 |
| 2 | Rc1/4 |

* Common port sizes are all Rc1/4.
 * Indicating numbers shown below are for common ports.

| Type | Vacuum side port | SUP side port |
|------|------------------|---------------|
| N.C. | 1 | 3 |
| N.O. | 3 | 1 |

Manifold base

Blanking plate part no.

For VVX31: VVX31-4A-
 For VVX32/33: VVX32-4A-

Seal material

| | |
|---|-----|
| - | NBR |
| F | FKM |

How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example
 VVX311-05-1 1 set "*" is the symbol for mounting.
 * VVX3131-00-1GR1... 4 sets Add an "*" in front of the part numbers
 * VVX31-4A 1 set for solenoid valves, etc. to be mounted.

U side (1) (2) (3) (4) (5) (6) U side

Enter the product's part number in order, counting from the 1st station on the left in the manifold arrangement, when viewed with the individual ports in front. The common ports on the right side are plugged.

G - Grommet
GS - With grommet surge voltage suppressor
T - With conduit terminal
TS - With conduit terminal and surge voltage suppressor
TL - With conduit terminal and light
TZ - With conduit terminal, surge voltage suppressor and light

C - Conduit
D - DIN
DS - DIN with surge voltage suppressor
DL - DIN with light
DZ - DIN with surge voltage suppressor and light
DO - For DIN (without connector)

* DIN type is available with class B insulation only.

* Refer to Table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.
 * Surge voltage suppressor is integrated into the AC/Class B coil as standard.

Table (1) Port/Orifice Size

| Solenoid valve | Orifice symbol (diameter) ^{Note)} | |
|----------------|--|---------------|
| | 3 (1.5/3 mmø) | 4 (2.2/4 mmø) |
| VVX31 | ● | — |
| VVX32 | — | ● |
| VVX33 | — | ● |

Note) The orifice diameter shows the supply pressure side/vacuum side.

Table (2) Solenoid Valve Option

| Option symbol | Seal material | | Body material | Guide pin material | Coil insulation type |
|---------------|-------------------|---------------|---------------|--------------------|----------------------|
| | Main valve poppet | Fixed sealant | | | |
| - | NBR | NBR | Brass (C37) | PPS | B |
| A | FKM | FKM | | | |

* Aluminum is the only available material for the manifold base.

Table (3) Rated Voltage – Electrical Option

| Rated voltage | AC/DC | Voltage symbol | Voltage | Class B | | |
|---------------|-------|----------------|---------|---------|---------|---|
| | | | | S | L | Z |
| AC | 1 | 100 V | ● | ● | — | |
| | 2 | 200 V | — | ● | — | |
| | 3 | 110 V | Note 1) | ● | Note 1) | |
| | 4 | 220 V | | | | |
| | 7 | 240 V | — | — | | |
| | 8 | 48 V | — | — | | |
| J | 230 V | — | — | | | |
| DC | 5 | 24 V | ● | ● | ● | |
| | 6 | 12 V | ● | — | — | |

* Class H coil is not available.

Note 1) Option S, Z are not available as a surge voltage suppressor is integrated into the AC/Class B coil as standard.



Series VX

Safety Instructions

These safety instructions are intended to prevent a hazardous situation and/or equipment damage. These instructions indicate the level of potential hazard by labels of "Caution", "Warning" or "Danger". To ensure safety, be sure to observe ISO 4414 ^{Note 1)}, JIS B 8370 ^{Note 2)} and other safety practices.

⚠ Caution : Operator error could result in injury or equipment damage.

⚠ Warning : Operator error could result in serious injury or loss of life.

⚠ Danger : In extreme conditions, there is a possible result of serious injury or loss of life.

Note 1) ISO 4414: Pneumatic fluid power--General rules relating to systems.

Note 2) JIS B 8370: General Rules for Pneumatic Equipment

⚠ Warning

1. The compatibility of the pneumatic equipment is the responsibility of the person who designs the pneumatic system or decides its specifications.

Since the products specified here are used in various operating conditions, their compatibility for the specific pneumatic system must be based on specifications or post analysis and/or tests to meet your specific requirements. The expected performance and safety assurance are the responsibility of the person who has determined the compatibility of the system. This person should continuously review the suitability of all items specified, referring to the latest catalogue information with a view to giving due consideration to any possibility of equipment failure when configuring a system.

2. Only trained personnel should operate pneumatically operated machinery and equipment.

Compressed air can be dangerous if handled incorrectly. Assembly, handling or repair of pneumatic systems should be performed by trained and experienced operators.

3. Do not service machinery/equipment or attempt to remove components until safety is confirmed.

1. Inspection and maintenance of machinery/equipment should only be performed once measures to prevent falling or runaway of the driven objects have been confirmed.
2. When equipment is removed, confirm that safety process as mentioned above. Turn off the supply pressure for this equipment and exhaust all residual compressed air in the system.
3. Before machinery/equipment is restarted, take measures to prevent quick extension of a cylinder piston rod, etc.

4. Contact SMC if the product will be used in any of the following conditions:

1. Conditions and environments beyond the given specifications, or if product is used outdoors.
2. Installation on equipment in conjunction with atomic energy, railway, air navigation, vehicles, medical equipment, food and beverages, recreation equipment, emergency stop circuits, clutch and brake circuits in press applications, or safety equipment.
3. An application which has the possibility of having negative effects on people, property, or animals, requiring special safety analysis.



3 Port Solenoid Valve for Fluid Control/Precautions 1

Be sure to read this before handling.

For detailed precautions on each series, refer to the main text.

Design

Warning

1. Cannot be used as an emergency shutoff valve, etc.

The valves presented in this catalogue are not designed for safety applications such as an emergency shutoff valve. If the valves are used in this type of system, other reliable safety assurance measures should also be adopted.

2. Extended periods of continuous energisation

The solenoid coil will generate heat when continuously energised. Avoid using in a tightly shut container. Install it in a well-ventilated area. Furthermore, do not touch it while it is being energised or right after it is energised.

3. This solenoid valve cannot be used for explosion proof applications.

4. Maintenance space

The installation should allow sufficient space for maintenance activities (removal of valve, etc.).

5. Liquid rings

In cases with a flowing liquid, provide a bypass valve in the system to prevent the liquid from entering the liquid seal circuit.

6. Actuator drive

When an actuator, such as a cylinder, is to be driven using a valve, take appropriate measures to prevent potential danger caused by actuator operation.

7. Pressure (including vacuum) holding

It is not usable for an application such as holding the pressure (including vacuum) inside of a pressure vessel because air leakage is entailed in a valve.

8. When the conduit type is used as equivalent to an IP65 enclosure, install a wiring conduit, etc.

9. When an impact, such as water hammer, etc., caused by the rapid pressure fluctuation is applied, the solenoid valve may be damaged. Please pay attention to this.

Selection

Warning

1. Confirm the specifications.

Give careful consideration to the operating conditions such as the application, fluid and environment, and use within the operating ranges specified in this catalogue.

2. Fluid

1) Type of fluid

Before using a fluid, confirm whether it is compatible with the materials from each model by referring to the fluids listed in this catalogue. Use a fluid with a kinematic viscosity of 50 mm²/s or less. If there is something you do not know, please contact SMC.

2) Inflammable oil, Gas,

Confirm the specification for leakage in the interior and/or exterior area.

Selection

Warning

3) Corrosive gas

Cannot be used since it will lead to cracks by stress corrosion or result in other incidents.

4) Use an oil-free specification when oil particles must not enter the fluid passage.

5) Applicable fluid on the list may not be used depending on the operating condition. Just because the compatibility list shows the general case, still give adequate confirmation when selecting a model.

3. Fluid quality

The use of a fluid which contains foreign matter can cause problems such as malfunction and seal failure by promoting wear of the valve seat and armature, and by sticking to the sliding parts of the armature, etc. Install a suitable filter (strainer) immediately upstream from the valve. As a general rule, use 80 to 100 mesh. When used to supply water to boilers, substances such as calcium and magnesium which generate hard scale and sludge are included. Since this scale and sludge can cause the valve to malfunction, install water softening equipment, and a filter (strainer) directly upstream from the valve to remove these substances.

4. Air quality

1) Use clean air.

Do not use compressed air which includes chemicals, synthetic oils containing organic solvents, salt or corrosive gases, etc., as it can cause damage or malfunction.

2) Install air filters.

Install air filters close to the valves on their upstream side. A filtration degree of 5µm or less should be selected.

3) Install an air dryer or after cooler, etc.

Compressed air that includes excessive drainage may cause malfunction of valves and other pneumatic equipment. To prevent this, install an air dryer or after cooler, etc.

4) If excessive carbon powder is generated, eliminate it by installing mist separators on the upstream side of the valves.

If excessive carbon powder is generated by the compressor, it may adhere to the inside of the valves and cause a malfunction.

Refer to SMC's Best Pneumatics catalogue for further details on compressed air quality.

5. Ambient environment

Use within the operable ambient temperature range. Confirm the compatibility between the product's composition materials and the ambient atmosphere. Be sure that the fluid used does not touch the external surface of the product.

6. Countermeasures against static electricity

Take measures to prevent static electricity since some fluids can cause static electricity.

7. For the low particle generation specification, please contact SMC.



3 Port Solenoid Valve for Fluid Control/Precautions 2

Be sure to read this before handling.


For detailed precautions on each series, refer to the main text.

Selection

⚠ Caution

1. Leakage voltage

Particularly when using a resistor in parallel with a switching element and using a C-R element (surge voltage suppressor) to protect the switching element, take note that leakage current will flow through the resistor, C-R element, etc., creating a possible danger that the valve may not turn off.

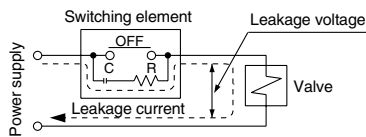

- AC/Class B coil: 5% or less of rated voltage
- AC/Class H coil: 20% or less of rated voltage
- DC coil: 2% or less of rated voltage

2. Low temperature operation

1. The valve can be used in an ambient temperature of between -10 to -20°C , however take measures to prevent freezing or solidification of impurities, etc.
2. When using valves for water application in cold climates, take appropriate countermeasures to prevent the water from freezing in tubing after cutting the water supply from the pump, by draining the water, etc. When heating by steam, be careful not to expose the coil portion to steam. Installation of a dryer or heat retaining of the body is recommended to prevent a freezing condition in which the dew point temperature is high and the ambient temperature is low, and the high flow runs.

Mounting

⚠ Warning

1. If air leakage increases or equipment does not operate properly, stop operation.

After mounting is completed, confirm that it has been done correctly by performing a suitable function test.

2. Do not apply external force to the coil section.

When tightening is performed, apply a wrench or other tool to the outside of the piping connection parts.

3. Be sure not to position the coil downwards.

When mounting a valve with its coil positioned downwards, foreign objects in the fluid will adhere to the iron core leading to a malfunction.

4. Do not warm the coil assembly with a heat insulator, etc.

Use tape, heaters, etc., for freeze prevention on the piping and body only. They can cause the coil to burn out.

5. Secure with brackets, except in the case of steel piping and copper fittings.

6. Avoid sources of vibration, or adjust the arm from the body to the minimum length so that resonance will not occur.

7. Painting and coating

Warnings or specifications printed or labelled on the product should not be erased, removed or covered up.

Piping

⚠ Caution


1. Preparation before piping

Before piping is connected, it should be thoroughly blown out with air (flushing) or washed to remove chips, cutting oil and other debris from inside the pipe.

2. Wrapping of pipe tape

When connecting pipes, fittings, etc., be sure that chips from the pipe threads and sealing material do not enter the valve.

Furthermore, when pipe tape is used, leave 1.5 to 2 thread ridges exposed at the end of the threads.

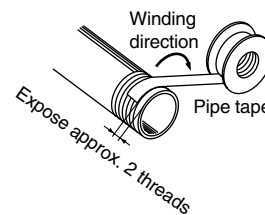

3. Avoid connecting ground lines to piping, as this may cause electric corrosion of the system.

4. Always tighten threads with the proper tightening torque.

When attaching fittings to valves, tighten with the proper tightening torque shown below.

Tightening Torque for Piping

| Connection threads | Proper tightening torque N·m |
|--------------------|------------------------------|
| Rc 1/8 | 7 to 9 |
| Rc 1/4 | 12 to 14 |
| Rc 3/8 | 22 to 24 |
| Rc 1/2 | 28 to 30 |

5. Connection of piping to products

When connecting piping to a product, refer to its instruction manual to avoid mistakes regarding the supply port, etc.

6. Steam generated in a boiler contains a large amount of drainage.

Be sure to operate it with a drain trap installed.

7. In applications such as vacuum and non-leak specifications, use caution specifically against the contamination of foreign matters or airtightness of the fittings.



3 Port Solenoid Valve for Fluid Control/Precautions 3

Be sure to read this before handling.

For detailed precautions on each series, refer to the main text.

Wiring

⚠ Caution

1. As a rule, use electrical wire with a cross sectional area of 0.5 to 1.25mm² for wiring. Furthermore, do not allow excessive force to be applied to the lines.
2. Use electrical circuits which do not generate chattering in their contacts.
3. Use voltage which is within $\pm 10\%$ of the rated voltage. In cases with a DC power supply where importance is placed on responsiveness, stay within $\pm 5\%$ of the rated value. The voltage drop is the value in the lead wire section connecting the coil.
4. When a surge from the solenoid affects the electrical circuitry, install a surge absorber, etc., in parallel with the solenoid. Or, adopt the option that comes with the surge voltage protection circuit. (However, a surge voltage occurs even if the surge voltage protection circuit is used. For details, please contact SMC.)


Electrical Connections

⚠ Caution

Grommet

Class H coil: AWG18 Insulator O.D. 2.2 mm

Class B coil: AWG20 Insulator O.D. 2.4 mm

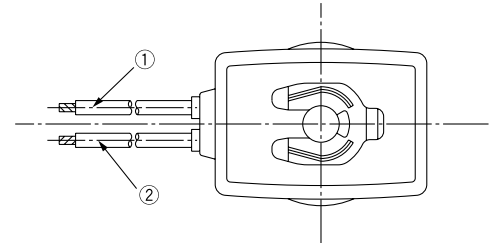


| Rated voltage | Lead wire colour | |
|-------------------|------------------|------|
| | ① | ② |
| DC (Class B only) | Black | Red |
| 100 VAC | Blue | Blue |
| 200 VAC | Red | Red |
| Other AC | Gray | Gray |

* There is no polarity.

DIN connector (Class B only)


Since internal connections are as shown below for the DIN connector, make connections to the power supply accordingly.



| Terminal no. | 1 | 2 |
|--------------|-------|-------|
| DIN terminal | + (-) | - (+) |

* There is no polarity.

- Use compatible heavy duty cords with cable O.D. of $\phi 6$ to 12.
- Use the tightening torques below for each section.

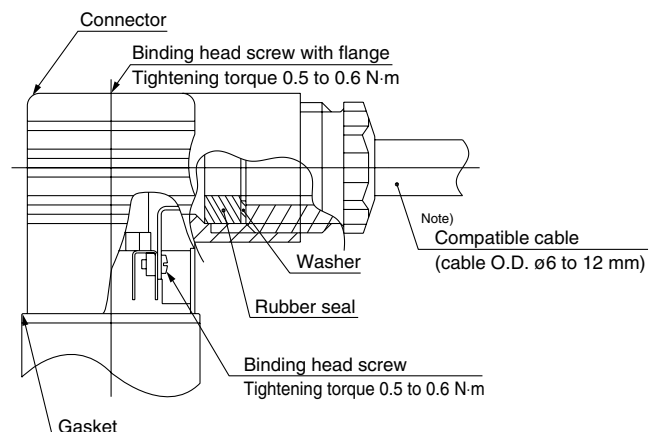

Note) For an outside cable diameter of $\phi 9$ to 12 mm, remove the internal parts of the rubber seal before using.



3 Port Solenoid Valve for Fluid Control/Precautions 4

Be sure to read this before handling.

For detailed precautions on each series, refer to the main text.


Electrical Connections

Caution

Conduit terminal

In the case of the conduit terminal, make connections according to the marks shown below.

- Use the tightening torques below for each section.
- Properly seal the terminal connection (G1/2) with the special wiring conduit, etc.

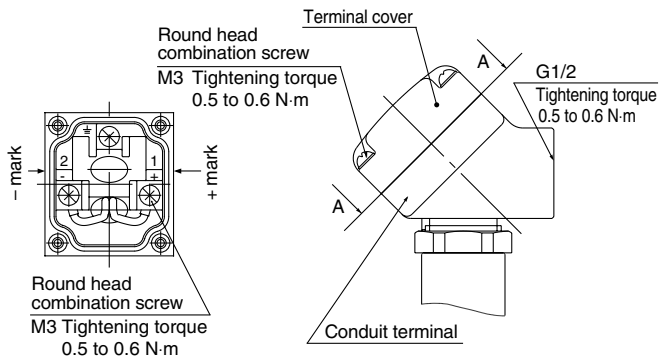


View A-A

(Internal connection diagram)

Conduit

When used as an IP65 equivalent, use seal (part no. VCW20-15-6) to install the wiring conduit. Also, use the tightening torque below for the conduit.

- Class H coil: AWG18 Insulator O.D. 2.2 mm
- Class B coil: AWG20 Insulator O.D. 2.4 mm

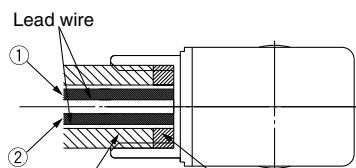

Wiring conduit
Bore size G1/2 Tightening torque 0.5 to 0.6 N·m

| Rated voltage | Lead wire colour | |
|---------------|------------------|------|
| | ① | ② |
| DC | Black | Red |
| 100 VAC | Blue | Blue |
| 200 VAC | Red | Red |
| Other AC | Gray | Gray |

* There is no polarity for DC.

| Description | Part no. |
|-------------|------------|
| Seal | VCW20-15-6 |


Note) Please order separately.

Electrical Circuits


Caution

DC circuit


Grommet, Conduit, Conduit terminal, DIN connector




Grommet, Conduit terminal, DIN connector



Conduit terminal, DIN connector




Conduit terminal, DIN connector

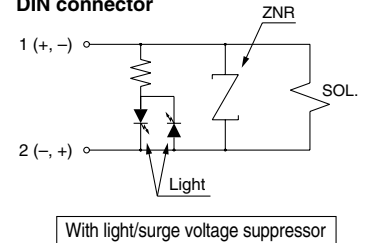


AC/Class B coil circuit

Grommet, Conduit, Conduit terminal, DIN connector




* Surge voltage suppressor is attached to the AC/Class B coil as standard.

Conduit terminal, DIN connector

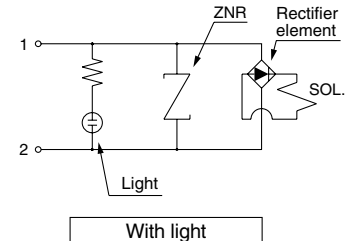


AC/Class H coil circuit


Grommet, Conduit, Conduit terminal




Grommet, Conduit terminal



Conduit terminal



Conduit terminal





3 Port Solenoid Valve for Fluid Control/Precautions 5

Be sure to read this before handling.

For detailed precautions on each series, refer to the main text.

Operating Environment

Warning

1. Do not use the valves in an atmosphere having corrosive gases, chemicals, salt water, water, steam, or where there is direct contact with any of these.
2. Do not use in explosive atmospheres.
3. Do not use in locations subject to vibration or impact.
4. Do not use in locations where radiated heat will be received from nearby heat sources.
5. Employ suitable protective measures in locations where there is contact with water droplets, oil or welding spatter, etc.

Lubrication

Caution

1. This solenoid valve can be operated without lubrication.

If a lubricant is used in the system, use turbine oil Class 1, ISO VG32 (with no additive). But do not lubricate a valve with EPDM seal.

Refer to the table of brand name of lubricants compliant with Class 1 turbine oil (with no additive), ISO VG32.

Class 1 Turbine Oil (with no additive), ISO VG32

| Classification of viscosity (cst) (40°C) | Viscosity according to ISO Grade | 32 |
|--|----------------------------------|-----------------------|
| Idemitsu Kosan Co.,Ltd. | | Turbine oil P-32 |
| Nippon Oil Corp. | | Turbine oil 32 |
| Cosmo Oil Co.,Ltd. | | Cosmo turbine 32 |
| Japan Energy Corp. | | Kyodo turbine 32 |
| Kygnus Oil Co. | | Turbine oil 32 |
| Kyushu Oil Co. | | Stork turbine 32 |
| Nippon Oil Corp. | | Mitsubishi turbine 32 |
| Showa Shell Sekiyu K.K. | | Turbine 32 |
| Tonen General Sekiyu K.K. | | General R turbine 32 |
| Fuji Kosan Co.,Ltd. | | Fucoal turbine 32 |

Please contact SMC regarding Class 2 turbine oil (with additives), ISO VG32.

Maintenance

Warning

1 Removing the product

The valve will reach a high temperature when used with high temperature fluids. Confirm that the valve temperature has dropped sufficiently before performing work. If touched inadvertently, there is a danger of being burned.

1. Shut off the fluid supply and release the fluid pressure in the system.
2. Shut off the power supply.
3. Demount the product.

2. Low frequency operation

Switch valves at least once every 30 days to prevent malfunction. Also, in order to use it under the optimum state, conduct a regular inspection once every six months.

Maintenance

Caution

1. Filters and strainers

1. Be careful regarding clogging of filters and strainers.
2. Replace filter elements after one year of use, or earlier if the pressure drop reaches 0.1 MPa.
3. Clean strainers when the pressure drop reaches 0.1 MPa.

2. Lubrication

When using with lubrication, never forget to lubricate continuously.

3. Storage

In case of long term storage after use with heated water, thoroughly remove all moisture to prevent rust and deterioration of rubber materials, etc.

4. Exhaust the drain from an air filter periodically.

Operating Precautions

Warning

1. Valves will reach high temperatures when used with high temperature fluids. Use caution, as there is a danger of being burned if the valve is directly touched.


EUROPEAN SUBSIDIARIES:

Austria

SMC Pneumatik GmbH (Austria).
Girakstrasse 8, A-2100 Korneuburg
Phone: +43 2262-62280, Fax: +43 2262-62285
E-mail: office@smc.at
http://www.smc.at


France

SMC Pneumatique, S.A.
1, Boulevard de Strasbourg, Parc Gustave Eiffel
Bussy Saint Georges F-77607 Marne La Vallée Cedex 3
Phone: +33 (0)1-6476 1000, Fax: +33 (0)1-6476 1010
E-mail: contact@smc-france.fr
http://www.smc-france.fr


Netherlands

SMC Pneumatics BV
De Ruyterkade 120, NL-1011 AB Amsterdam
Phone: +31 (0)20-5318888, Fax: +31 (0)20-5318880
E-mail: info@smcpneumatics.nl
http://www.smcpneumatics.nl


Spain

SMC España, S.A.
Zuazobidea 14, 01015 Vitoria
Phone: +34 945-184 100, Fax: +34 945-184 124
E-mail: post@smc.smces.es
http://www.smces.es


Belgium

SMC Pneumatics N.V./S.A.
Nijverheidsstraat 20, B-2160 Wommelgem
Phone: +32 (0)3-355-1464, Fax: +32 (0)3-355-1466
E-mail: post@smcpneumatics.be
http://www.smcpneumatics.be


Germany

SMC Pneumatik GmbH
Boschring 13-15, D-63329 Egelsbach
Phone: +49 (0)6103-4020, Fax: +49 (0)6103-402139
E-mail: info@smc-pneumatik.de
http://www.smc-pneumatik.de


Norway

SMC Pneumatics Norway A/S
Vollsveien 13 C, Granfos Næringspark N-1366 Lysaker
Tel: +47 67 12 90 20, Fax: +47 67 12 90 21
E-mail: post@smc-norge.no
http://www.smc-norge.no


Sweden

SMC Pneumatics Sweden AB
Ekhagsvägen 29-31, S-141 71 Huddinge
Phone: +46 (0)8-603 12 00, Fax: +46 (0)8-603 12 90
E-mail: post@smcpneumatics.se
http://www.smc.nu


Bulgaria

SMC Industrial Automation Bulgaria EOOD
16 klement Ohridski Blvd., fl.13 BG-1756 Sofia
Phone: +359 2 9744492, Fax: +359 2 9744519
E-mail: office@smc.bg
http://www.smc.bg


Greece

S. Parianosopoulos S.A.
7, Konstantinoupoleos Street, GR-11855 Athens
Phone: +30 (0)1-3426076, Fax: +30 (0)1-3455578
E-mail: parianos@hol.gr
http://www.smceu.com


Poland

SMC Industrial Automation Polska Sp.z.o.o.
ul. Konstruktorska 11A, PL-02-673 Warszawa,
Phone: +48 22 548 5085, Fax: +48 22 548 5087
E-mail: office@smc.pl
http://www.smc.pl


Switzerland

SMC Pneumatik AG
Dorfstrasse 7, CH-8484 Weisslingen
Phone: +41 (0)52-396-3131, Fax: +41 (0)52-396-3191
E-mail: info@smc.ch
http://www.smc.ch


Croatia

SMC Industrijska automatika d.o.o.
Crnomerec 12, 10000 ZAGREB
Phone: +385 1 377 66 74, Fax: +385 1 377 66 74
E-mail: office@smc.hr
http://www.smceu.com


Hungary

SMC Hungary Ipari Automatizálási Kft.
Budafoki út 107-113, H-1117 Budapest
Phone: +36 1 371 1343, Fax: +36 1 371 1344
E-mail: office@smc-automation.hu
http://www.smc-automation.hu


Portugal

SMC Sucursal Portugal, S.A.
Rua de Engº Ferreira Dias 452, 4100-246 Porto
Phone: +351 22-610-89-22, Fax: +351 22-610-89-36
E-mail: postpt@smc.smces.es
http://www.smces.es


Turkey

Entek Pnömatik San. ve Tic Ltd. Sti.
Perpa Tic. Merkezi Kat: 11 No: 1625, TR-80270 Okmeydanı Istanbul
Phone: +90 (0)212-221-1512, Fax: +90 (0)212-221-1519
E-mail: smc-entek@entek.com.tr
http://www.entek.com.tr


Czech Republic

SMC Industrial Automation CZ s.r.o.
Hudcova 78a, CZ-61200 Brno
Phone: +420 5 414 24611, Fax: +420 5 412 18034
E-mail: office@smc.cz
http://www.smc.cz


Ireland

SMC Pneumatics (Ireland) Ltd.
2002 Citywest Business Campus, Naas Road, Saggart, Co. Dublin
Phone: +353 (0)1-403 9000, Fax: +353 (0)1-464-0500
E-mail: sales@smcpneumatics.ie
http://www.smcpneumatics.ie


Romania

SMC Romania srl
Str Frunzei 29, Sector 2, Bucharest
Phone: +40 213205111, Fax: +40 213261489
E-mail: smcromania@smcromania.ro
http://www.smcromania.ro


UK

SMC Pneumatics (UK) Ltd
Vincent Avenue, Crownhill, Milton Keynes, MK8 0AN
Phone: +44 (0)800 1382930 Fax: +44 (0)1908-555064
E-mail: sales@smcpneumatics.co.uk
http://www.smcpneumatics.co.uk


Denmark

SMC Pneumatik A/S
Knudsminde 4B, DK-8300 Odder
Phone: +45 70252900, Fax: +45 70252901
E-mail: smc@smc-pneumatik.dk
http://www.smc.dk


Italy

SMC Italia S.p.A
Via Garibaldi 62, I-20061 Carugate, (Milano)
Phone: +39 (0)2-927211, Fax: +39 (0)2-9271365
E-mail: mailbox@smcitalia.it
http://www.smcitalia.it


Russia

SMC Pneumatik LLC.
4B Sverdlovskaja nab, St. Petersburg 195009
Phone: +812 718 5445, Fax: +812 718 5449
E-mail: info@smc-pneumatik.ru
http://www.smc-pneumatik.ru


Estonia

SMC Pneumatics Estonia OÜ
Laki 12-101, 106 21 Tallinn
Phone: +372 (0)6 593540, Fax: +372 (0)6 593541
E-mail: smc@smcpneumatics.ee
http://www.smcpneumatics.ee


Latvia

SMC Pneumatics Latvia SIA
Smerla 1-705, Riga LV-1006, Latvia
Phone: +371 781-77-00, Fax: +371 781-77-01
E-mail: info@smclv.lv
http://www.smclv.lv


Slovakia

SMC Priemyselná Automatizácia, s.r.o.
Námestie Martina Benku 10, SK-81107 Bratislava
Phone: +421 2 444 56725, Fax: +421 2 444 56028
E-mail: office@smc.sk
http://www.smc.sk


Finland

SMC Pneumatics Finland OY
PL72, Tiistiniityntie 4, SF-02031 ESPOO
Phone: +358 207 513513, Fax: +358 207 513595
E-mail: smcfi@smc.fi
http://www.smc.fi


Lithuania

SMC Pneumatics Lietuva, UAB
Savanoriu pr. 180, LT-01354 Vilnius, Lithuania
Phone: +370 5 264 81 26, Fax: +370 5 264 81 26


Slovenia

SMC industrijska Avtomatika d.o.o.
Grajski trg 15, SLO-8360 Zuzemberk
Phone: +386 738 85240 Fax: +386 738 85249
E-mail: office@smc-ind-avtom.si
http://www.smc-ind-avtom.si


OTHER SUBSIDIARIES WORLDWIDE:

ARGENTINA, AUSTRALIA, BOLIVIA, BRASIL, CANADA, CHILE,
CHINA, HONG KONG, INDIA, INDONESIA, MALAYSIA, MEXICO,
NEW ZEALAND, PHILIPPINES, SINGAPORE, SOUTH KOREA,
TAIWAN, THAILAND, USA, VENEZUELA

<http://www.smceu.com>
<http://www.smcworld.com>